

200 North Cedar Road - New Lenox, Illinois 60451-1751 - (800) 383-0468 or (815) 485-6161 - FAX (815) 485-4433 - Email sahci@sahci.com - Home Page www.sahci.com

May 21, 2022

975920

Angel Camacho SET Environmental 450 Sumac Road Wheeling, Illinois 60090

RE: Thorium Monitoring – City of Chicago Department of Water Management CDOT Permit: 1672528 352 N. Lower Stetson Ave.

Dear Mr. Camacho:

Stan A. Huber Consultants, Inc (SAHCI) was hired by your firm to provide radiation monitoring during the excavation for a Chicago Department of Water Management catch basin outlet repair at 352 N. Lower Stetson Ave. in Chicago, Illinois. The monitoring was performed by Mark Dewald, SAHCI Health Physics Technician, on May 10, 2022. All activities were conducted under the guidance of document *SET General Procedure for Thorium Monitoring.* 

## Instrumentation

Surface gamma scans were performed using a Ludlum Model 2221 Scaler / Ratemeter (serial no. 126496) with attached Ludlum Model 44-10 2"x2" Nal Detector (w/ 6" collimated lead shield). The instrument was calibrated on May 3, 2022. The US Environmental Protection Agency (USEPA) action level of 7.1 picocuries per gram (pCi/g) total thorium for this instrument is 7,819 counts per minute (cpm).

The average background count rate for this location was measured at 1,682 cpm.

## Soil Gamma Scans

Gamma surface scans were performed using the Ludlum Model 2221 Scaler / Ratemeter described above. Survey data was collected by entering the excavation and recording the highest count rate for the floor and walls to a depth of 6 feet below ground surface. Any material excavated below 4 feet was surveyed in the excavator bucket as it was removed. All asphalt, concrete, and soil were loaded directly into a truck for disposal.

The maximum gamma count rate for each lift was recorded on the attached Radiation Survey Form. The count rates in the excavation ranged from 1,200 cpm to 2,300 cpm. No count rates were found at any time that exceeded the threshold limit of 7,819 cpm.

## Additional Monitoring

Since no count rates were identified above the 7.1 pCi/gram threshold limit, no additional soil sampling, air monitoring, or personnel monitoring were performed.

I will be providing a copy of this report to both the City of Chicago Department of Public Health and US Environmental Protection Agency, as required.

Thank you for your assistance with this project. If you have any questions or need additional information, please call me at (815) 485-6161.

Sincerely, Stan A. Huber Consultants, Inc.

Clester

Glenn Huber, CHP President




## **Radiation Survey Form**

Location/ Project ID: 352 N. Stetson St. Pipe Repair - DWM

Date: 5/10/22	Technician: <u>Mark Dewald</u>
Inst Model: Ludlum 2221	Serial No. :126496
Probe Type: 1"x1" Nai 2"x2" Nal Shielded Not Shielded	Lift Elevation: Surface to -72" BGS
Background <u>1,682</u> cpm	Action Level: 7,819 cpm

Write grid designations in circles. Record highest counts for grid in cpm. Record 30 second counts at grid intersections (if required). Shade areas of elevated counts and record max cpm.

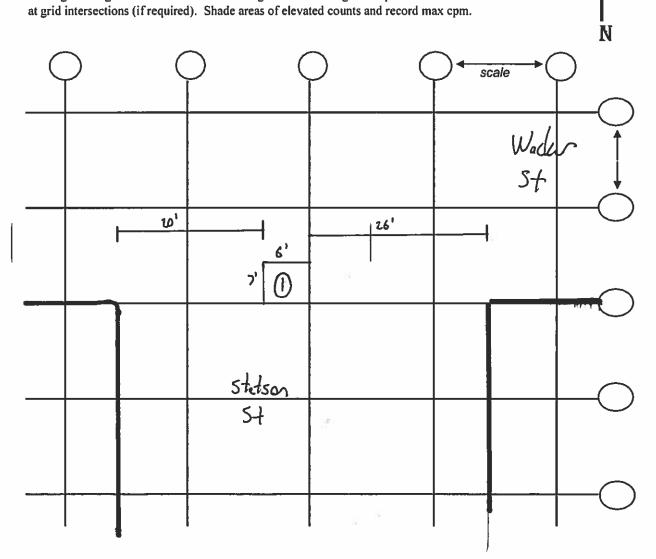

	0-12"	12-30"	30-48"	48-66"	66-84"	72-90"
Area 1	1200	1600	2100	2200	2300	2200