



Spokane County
Environmental Services
Kevin R. Cooke, P.E., Director

October 12, 2018

Washington Department of Ecology
Attn: Huckleberry Palmer
4601 N Monroe St.
Spokane, WA 99205

RE: Colbert Landfill Remediation Project Annual Report 2018

Dear Huckleberry,

Enclosed is a copy of the Colbert Landfill Remediation Project Annual Report for April 2018.

If you have any comments or questions, please call me at (509) 238-6607.

Sincerely,

Austin Stewart

Austin Stewart
Water Resources Specialist

Enc.

Colbert Landfill Remediation Project

Annual Report 2018

Progress Report for

July 2017 through April 2018

Prepared by:

Spokane County Landfill Closure
22515 N Elk-Chattaroy Rd
Colbert, WA 99005

Contents

1.0	Colbert Landfill Remediation Project Summary.....	7
1.1	Geology/Hydrogeology	8
1.2	Shut-down Test-Lower Aquifer	9
1.3	Upper Aquifer Monitoring	9
1.3.1	Compliance Monitoring (VOC's).....	9
1.3.2	1, 4-Dioxane Sampling.....	9
1.3.3	Minimal Functional Standards Post Closure	9
1.4	Residential Well Monitoring.....	9
1.5	Supplemental Sampling.....	10
1.6	Landfill Operations and Maintenance.....	10
2.0	Shut-down Test	11
2.1	Shut-down Testing Locations and Schedule.....	11
2.2	Shut-down Test Monitoring.....	11
2.2.1	Groundwater Elevations.....	11
2.2.2	Field Parameters.....	11
2.2.3	Constituents of Concern (COC's)	11
2.3	Data Evaluation	12
2.4	Program Changes or Modifications.....	12
2.5	Cost Savings.....	12
3.0	Upper Aquifer Monitoring	26
3.1	Field Data and Groundwater Elevations	26
3.2	Compliance Monitoring (VOC's)	26
3.2.1	Chemical Data.....	26
3.2.2	Criteria	26
3.3	1,4-Dioxane Sampling	26
3.3.1	Chemical Data.....	26
3.4	Upper Aquifer Minimal Functional Standards Monitoring.....	27
3.4.1	Chemical Data.....	27
3.4.2	Criteria.....	27
3.4.3	Statistical Analysis.....	27
4.0	Residential Program	43

4.1	Locations and Schedule.....	43
4.2	Monitoring Results and Criteria	43
4.3	Data Evaluation	43
4.4	Program Modifications	43
5.0	Landfill Operations and Maintenance.....	51
6.0	References	53

Table 2-1 Colbert Landfill Shut-down Test Sampling Schedule Year 3 (May 2017 through April 2018)	14
Table 2-2 Shut-down Test Location Field Parameters	17
Table 2-3 Colbert Landfill Shut-down Test Criteria	18
Table 2-4 Shut-down Test Compliance Well Analytical Results	19
Table 2-5 Lower Aquifer Extraction Well Analytical Results	20
Table 3-1 Upper Aquifer Monitoring Programs and Locations	28
Table 3-2 Upper Aquifer Criteria	28
Table 3-3 Upper Aquifer Field Parameters	30
Table 3-4 Upper Aquifer Groundwater Monitoring Results	33
Table 3-5 1,4-Dioxane Monitoring Results	34
Table 3-6 Summary Results for the Mann-Whitney Nonparametric Significance Test (2018)	40
Table 4-1 Residential Well Sampling Schedule for Reporting Period	45
Table 4-2 Residential Groundwater Monitoring Program Results	47
Table 5-1 Supplemental Wells Field Parameters	53
Table 5-2 Supplemental Well Analytical Results	54
Figure 2-1 Shut-down Test Locations	13
Figure 2-2 Lower Aquifer Groundwater Elevations	15
Figure 2-3 Lower Aquifer Groundwater Contours	16
Figure 2-4 Lower Aquifer Monitoring Well COC Concentrations	21
Figure 2-5 Lower Aquifer Extraction Well COC Concentrations	22
Figure 2-7 Lower Aquifer Extraction Well COC Concentrations	23
Figure 2-8 Lower Aquifer Extraction Well Concentrations	24
Figure 2-9 Lower Aquifer Estimated TCA Plume	25
Figure 3-1 Upper Aquifer Compliance Monitoring Locations	29
Figure 3-2 Upper Aquifer Groundwater Elevations vs. Time	31
Figure 3-3 Upper Aquifer Estimated Groundwater Elevation Contours	32
Figure 3-4 Upper Aquifer COC Concentrations vs Time	35
Figure 3-5 Upper Aquifer Estimated TCA Plume Boundaries	36
Figure 3-6 1,4-Dioxane Concentrations vs Time	37
Figure 3-7 Upper Aquifer Minimal Functional Standards (MFS) Parameters vs Time	38
Figure 3-8 Upper Aquifer Minimal Functional Standards (MFS) Parameters vs Time	39
Figure 3-9 Box Plots for Background and Downgradient MFS Wells (2018)	41
Figure 4-1 Residential Well Sampling Locations	44
Figure 4-2 Upper Aquifer Residential Wells Concentrations vs Time	49
Figure 4-3 Lower Aquifer Residential Wells Concentrations vs Time	50
Figure 5-1 Supplemental Sampling Locations	49
Figure 5-2 Supplemental Well COC Concentrations	55
Figure 5-3 Supplemental Well COC Concentrations	56
Figure 5-4 Supplemental Well COC Concentrations	57

1.0 Colbert Landfill Remediation Project Summary

The Colbert Landfill Superfund site is a closed, 40-acre, municipal solid waste landfill located approximately 15 miles north of Spokane, Washington, and about 2.5 miles north of Colbert, Washington. The landfill received waste from 1968 to 1986 when it became filled to capacity. Groundwater in the vicinity of the landfill was found to be contaminated with volatile organic compounds and in 1983, the landfill was placed on the National Priorities List (NPL) by EPA. In 1989, a consent decree was executed to implement a site remedy. The site remedy includes:

- An available alternate water supply for residential wells impacted by groundwater contamination originating from the landfill.
- Institutional Controls
- Construction and operation of a pump and treat system to capture and prevent further spread of groundwater contaminants.
- Landfill closure according to the State of Washington regulations Minimal Functional Standards (WAC173-304).
- Monitoring of contaminants to protect human health and the environment at the site.

Construction of a pump and treat (P&T) system was completed in 1994. The P&T system operated successfully for 20 years. In 2014, an EPA recommended shut-down test was initiated to determine if the facility was continuing to add any significant benefit to the clean-up.

The programs currently in place include a Shut-down Test (lower aquifer) for the pump and treat system; and upper aquifer compliance groundwater monitoring (includes 1,4-dioxane monitoring and Minimal Functional Standards (MFS) monitoring of the upper aquifer); residential well monitoring (includes both upper and lower aquifers); supplemental sampling (includes both upper and lower aquifers); and landfill cover maintenance and monitoring. The groundwater monitoring programs and criteria are summarized below.

Current Monitoring Programs

Program	Aquifer	Parameters	Schedule
Shut-down Test	Lower	VOC's	Annual (Extraction wells Quarterly)
Upper Aquifer Compliance	Upper	VOC's	Annual (Extraction wells Quarterly)
1,4-Dioxane Sampling	Upper	1,4-Dioxane	Annual
MFS Monitoring	Upper	Cl/NH3/NO2/NH3 /SO4/Fe/Mn/Zn/T OC/COD	Annual
Residential Monitoring	Lower /Upper	VOC's	Monthly/Quarterly/SemiAnnual /Annual/BiAnnual
Supplemental Sampling	Lower/ Upper	VOC's	Every five years

Program Criteria

PROGRAM	CRITERIA	TCA	DCE	DCA	TCE	PCE	MC	1,4-Dioxane	Units	
CONSENT DECREE	Performance	200	7	4050	5	0.7	2.5		ug/L	
	Evaluation	200	7	4050	5	0.7	2.5	7		
SHUT-DOWN TEST	Action Level	130	4.55	2632	3.25	0.5	1.63			
	Evaluation	200	7	4050	5	0.7	2.5			
RESIDENTIAL Monthly sampling initiated, evaluated in 12 months Exeedance requires alternative drinking water source be supplied	Action Level	130	4.55	2632	3.25	0.5	1.63			
	MCL	200	7	4050	5	0.7	2.5			
		Cl	Fe	Mn	Zn	TOC	COD	SO4	NO3	
MFS	(mg/L)	250	0.3	0.05	5	NA	NA	250	10	mg/L

1.1 Geology/Hydrogeology

The geology beneath the Site consists of six vertically stratified and laterally discontinuous geologic units derived from glacial and fluvial material, modified by erosional (and possibly landslide) processes, overlaid on granitic bedrock. There are two primary aquifers that include the saturated portion of the Upper Sand and Gravel Unit and the saturated portion of the Lower Sand and Gravel Unit, which are separated by a Lacustrine Unit that serves as an aquitard. The Latah Formation serves as an aquitard that underlies the Lower Sand and Gravel Aquifer at most locations. A basalt unit forms a secondary aquifer interbedded in the Latah Aquitard and is referred to as the Basalt Aquifer. The Granite Unit is an aquitard that underlies the Latah Formation and serves as the lower boundary to the regional flow system. For more information, please refer to the Phase I Engineering Report (Landau Associates 1991).

The Upper Sand and Gravel Unit aquifer (Upper Aquifer) is unconfined with a water table that lies approximately 90 ft below the ground surface. Groundwater flow in this aquifer is generally north to south, changing to the southeast approximately 1 mile south of the Site. The direction of flow appears to be influenced by the topography of the upper surface of the Lacustrine Aquitard (Landau Associates 1991).

The Lower Sand and Gravel Unit aquifer (Lower Aquifer) is confined to the west of the landfill and unconfined to the east of the landfill. To the west of the landfill, the Upper and Lower aquifers are separated by the Lacustrine unit, which causes the confined conditions in that area. Groundwater flow in the Lower Aquifer is predominantly toward the west with discharge to the Little Spokane River.

1.2 Shut-down Test-Lower Aquifer

A pump and treat system was successfully operated from 1994 through March 31, 2014 to prevent further spread of groundwater contamination emanating from the landfill. A shut-down test for the lower aquifer pump and treat system was deemed appropriate for the site after a Remedial System Evaluation (RSE) was performed as recommended in the 2009 Five Year Review (EPA). The RSE recommendation stated that with the extensive groundwater monitoring programs in place and with concentrations having decreased substantially after 20 years of operation, the current pump and treat system may not be adding significant benefit to the overall protectiveness of the remedy and that a shut-down test would help determine its efficacy. The shut-down test procedures are outlined in the *Final Work Plan, Groundwater Pump and Treat System Shut-down Test, Colbert Landfill CERCLA Site, Spokane County Utilities/ Landau Assoc. 2013*. See Section 2 of this report for more details. The upper aquifer monitoring wells are governed by the Consent Decree compliance, Post Closure (Minimal Functional Standards), and 1,4-dioxane sampling programs and are not included in the Shut-down test work plan.

1.3 Upper Aquifer Monitoring

1.3.1 Compliance Monitoring (VOC's)

The compliance monitoring sampling program is outlined in the Consent Decree and performed according to the Colbert Landfill Operations and Maintenance manual (*Colbert Landfill Operations and Maintenance Manual, 1998*). During implementation of the lower aquifer system Shut-down Test, the compliance monitoring will only apply to the upper aquifer. Per conditions set forth in the consent decree (Appendix B, page V-7), the south system extraction wells are not required to be in operation and have been on stand-by status since 2004, and therefore are included in the compliance monitoring program.

1.3.2 1, 4-Dioxane Sampling

During the 2005 (3rd) Five Year Site Review, EPA specified an additional constituent (1,4-Dioxane) for evaluation at the Colbert Landfill site. After extensive monitoring in both the upper and lower aquifers, it was determined that an ongoing monitoring program would apply to selected wells in the upper aquifer only. The selected upper aquifer well locations are sampled for 1,4-dioxane according to the *1,4-Dioxane Work Plan for the Colbert Landfill (December 2007)*.

1.3.3 Minimal Functional Standards (MFS) Post Closure

The landfill was closed pursuant to requirements of the Minimal Functional Standards for Solid Waste Handling (MFS, WAC173-304). Lower aquifer locations, as outlined in the MFS Groundwater Monitoring Plan (Landau Assoc., 1996), require no additional monitoring after the 2 year monitoring period, which ended in January 1999. Monitoring for the upper aquifer continue according to the *Colbert Landfill Operations and Maintenance Manual, 1998*, and the *MFS Groundwater Monitoring Plan, 1996*.

1.4 Residential Well Monitoring

The Consent Decree specified that domestic wells within the vicinity of the landfill be monitored to protect human health. Domestic well locations and schedules for this program were selected by

proximity to landfill contamination and are evaluated on a regular basis to accommodate any changes in groundwater contamination. This program includes well locations in both the upper and lower aquifers. Sampling for this program is done in accordance with the *Quality Assurance and Field Sampling Plan-Colbert Residential Well Sampling, 1991* and is governed by the Consent Decree.

1.5 Supplemental Sampling

Supplemental sampling occurs every five years and is intended to collect additional data from monitoring and residential wells not regularly sampled. Although there are no criteria for monitoring or reporting associated with supplemental sampling, data collected helps provide a more accurate snapshot of groundwater flow and contamination throughout the area.

1.6 Landfill Operations and Maintenance

In 1997, the landfill closure construction (cover system and components) was completed as part of the MFS requirements. The landfill gas collection and treatment system is monitored and maintained on a regular basis as outlined in the *Operations and Maintenance Manual for Colbert Landfill Closure, CH2MHill, May 1997*.

2.0 Shut-down Test

A shut-down test of the Colbert Landfill Groundwater Pump and Treat facility was initiated April 1, 2014 when all lower aquifer extraction wells were turned off and placed in standby mode. The shut-down test was deemed appropriate for the site after a Remedial System Evaluation (RSE) was performed as recommended in the 2009 Five Year Review (EPA). The shut-down test is performed according to the *Final Work Plan, Groundwater Pump and Treat System Shut-down Test, Colbert Landfill CERCLA Site, Spokane County Utilities/ Landau Assoc. 2013*.

2.1 Shut-down Testing Locations and Schedule

The lower aquifer wells selected as monitoring locations for the Colbert Landfill pump and treat system shut-down test include: the compliance monitoring well clusters (CD-41, CD-42, CD-43, CD-44, CD-45, and CD-48), monitoring well CD-49, and the lower aquifer extraction wells (CP-E1, CP-E2, CP-E3, CP-W1, CP-W2, and CP-W3). Locations are presented in Figure 2-1. Collection of groundwater samples (contaminant sampling) from the shut-down locations, along with the collection of water level measurements, was performed as outlined in Table 2-1.

2.2 Shut-down Test Monitoring

The lower aquifer extraction wells, the compliance monitoring well clusters (CD-41, CD-42, CD-43, CD-44, CD-45, and CD-48) and monitoring well CD-49 were sampled according to the *Colbert Landfill Operations and Maintenance Manual, 1998*. Field parameters were taken and VOC samples were collected. There were no problems/issues associated with sampling during the reporting period.

2.2.1 Groundwater Elevations

Groundwater elevations for the reporting period are shown in Table 2-2 and in Figure 2-2. Estimated groundwater contours and flow are shown in Figure 2-3. Measurements were consistent and followed typical seasonal variation with levels slightly higher in the spring and slightly lower during the fall. Extraction well hydrographs show the increase in groundwater levels at the immediate vicinity of those wells in April 2014 when the system was shut down.

2.2.2 Field Parameters

Field parameters taken at the shut-down test locations are shown in Table 2-2. The highest conductivities were mostly seen in the east system extraction wells. Conductivity values in monitoring wells ranged from 261 to 1224 umhos/cm. Measurements of pH ranged from 6.97 to 7.98, with the lowest pH values generally found in the east system extraction wells.

2.2.3 Constituents of Concern (COC's)

Constituent of concern concentrations for Shut-down Test locations are presented Table 2-4. Concentrations versus time for Shut-down locations are presented in Figure 2-4. All detected concentrations found in the shut-down test compliance wells were well below any applicable criteria. Criteria are shown in Table 3-2. The COC's found in the shut-down program criteria dependent wells were TCA and DCE and at low concentrations. Although the concentrations found in the wells were far below any criteria, monitoring well CD-49 was kept on a quarterly sampling

schedule to better evaluate the increasing TCA concentrations found in this well. See Figure 2-9 for the estimated TCA plume boundaries in the lower aquifer.

Lower aquifer extraction wells are not criteria dependent locations, and therefore actions during the shut-down test are not governed by COC concentrations in these wells. Analytical results from the extraction well sampling are shown in Table 2-5. Time versus concentration plots are found in Figure 2-5 through Figure 2-8. In general, concentrations of COC's have remained relatively stable in east system wells and have significantly increased in CP-W3. Concentrations in CP-W2, after noticeably decreasing three months after the wells were inactivated, have remained low.

2.3 Data Evaluation

Data indicates a slight shift in plume concentrations toward the western edge of landfill, evident by the emerging concentrations of TCA and DCE found in CD-49 and increasing concentrations (rebound) found in CP-W3. Supplemental sampling wells in the center of the landfill showed significant TCA concentrations and indicated a more connective plume than historically mapped. TCA data for supplemental sampling can be found in Table 5-3.

2.4 Program Changes or Modifications

No criteria were exceeded during the reporting period. As stated in the work plan, sampling at the lower aquifer compliance monitoring wells is now on an annual schedule and will be sampled again in April 2019. The exception to this is monitoring well CD-49. Quarterly sampling will continue at CD-49 to monitor the increasing trend in concentrations. Per the EPA's Optimization Report (2017) recommendations, the sampling frequency at well clusters CD-43 and CD-42 will be re-evaluated and a sampling plan to monitor the area around CD-49 will be submitted later in 2018.

Quarterly sampling will continue at the extraction wells, as running the wells periodically will assist with preventive maintenance and provide indicators for any possible changes in COC concentrations near the landfill boundaries.

2.5 Cost Savings

Typical electrical costs associated with operating the pump and treat system for the lower aquifer on a continual basis for a period of one year were approximately \$59,000. From May 2017 through April 2018 the cost for electricity at the facility during the third year of the shut-down test was \$10,873.

Increases in lab costs were minimal when compared to the savings in electricity.

Typical Annual Electrical Costs		\$60,000
Electrical Costs for Fourth Year of Shut-down Test		-\$10,873
Estimated Total Cost Savings		\$49,127

Figure 2-1 Shut-down Test Locations

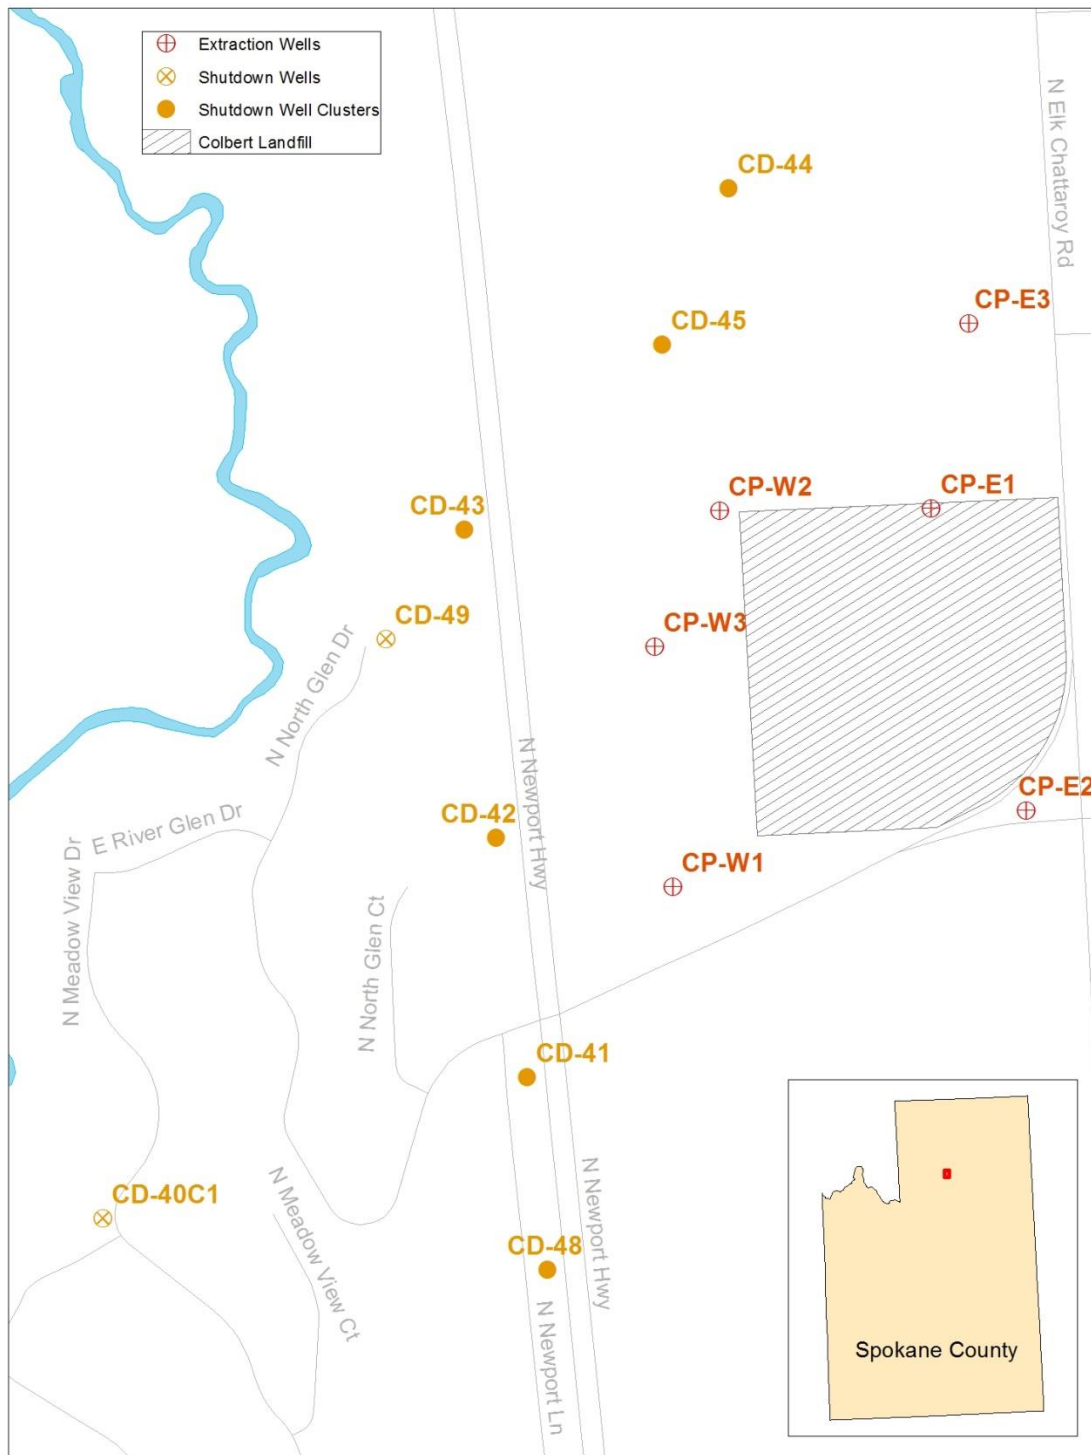


Table 2-1 Colbert Landfill Shut-down Test Sampling Schedule (May 2017 through April 2018)

System	Well ID	Monitoring Frequency		Shut-down Criteria Applies?
		Water Levels	Sampling	
West	CD-40C1	Quarterly	Annual	Yes
	CD-41C2	Quarterly	Annual	
	CD-41C3	Quarterly	Annual	
	CD-42C1	Quarterly	Annual	Yes
	CD-42C2	Quarterly	Annual	
	CD-42C3	Quarterly	Annual	
	CD-43C1	Quarterly	Annual	Yes
	CD-43C2	Quarterly	Annual	
	CD-43C3	Quarterly	Annual	
	CD-44C1	Quarterly	Annual	Yes
	CD-44C2	Quarterly	Annual	
	CD-44C3	Quarterly	Annual	
	CD-45C1	Quarterly	Annual	Yes
	CD-45C2	Quarterly	Annual	
	CD-45C3	Quarterly	Annual	
	CD-48C1	Quarterly	Annual	Yes
	CD-48C2	Quarterly	Annual	
	CD-48C3	Quarterly	Annual	
	CD-49	Quarterly	Quarterly	Yes
	CP-W1	Quarterly	Quarterly	No
	CP-W2	Quarterly	Quarterly	
	CP-W3	Quarterly	Quarterly	
East	CP-E1	Quarterly	Quarterly	No
	CP-E2	Quarterly	Quarterly	
	CP-E3	Quarterly	Quarterly	

Figure 2-2 Lower Aquifer Groundwater Elevations

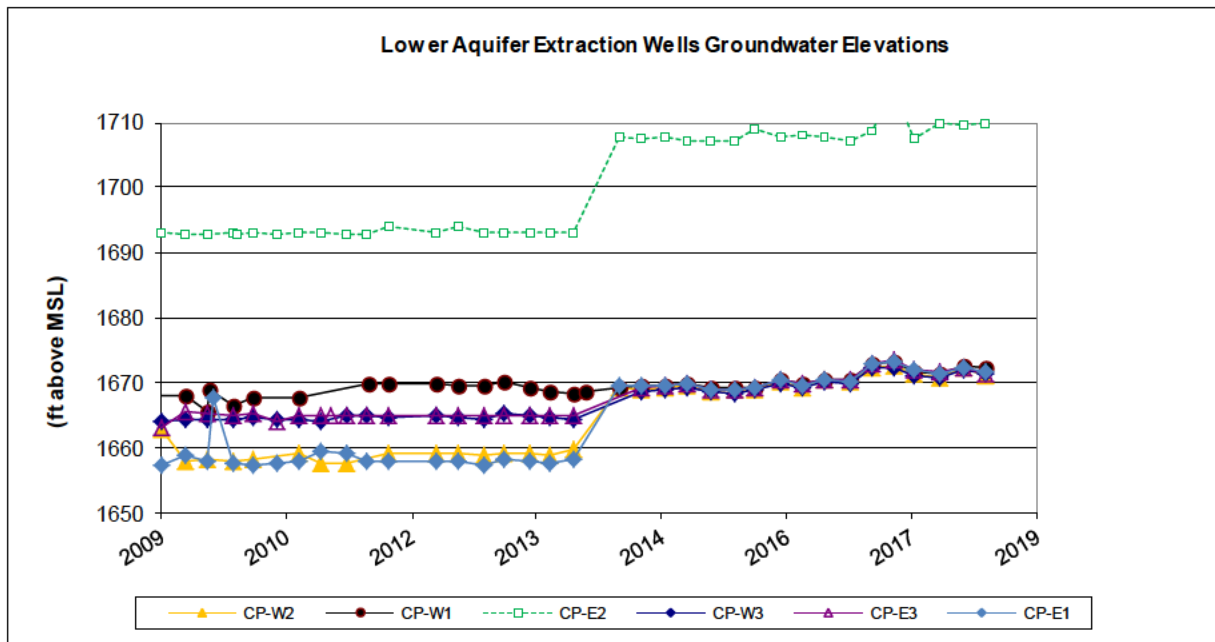
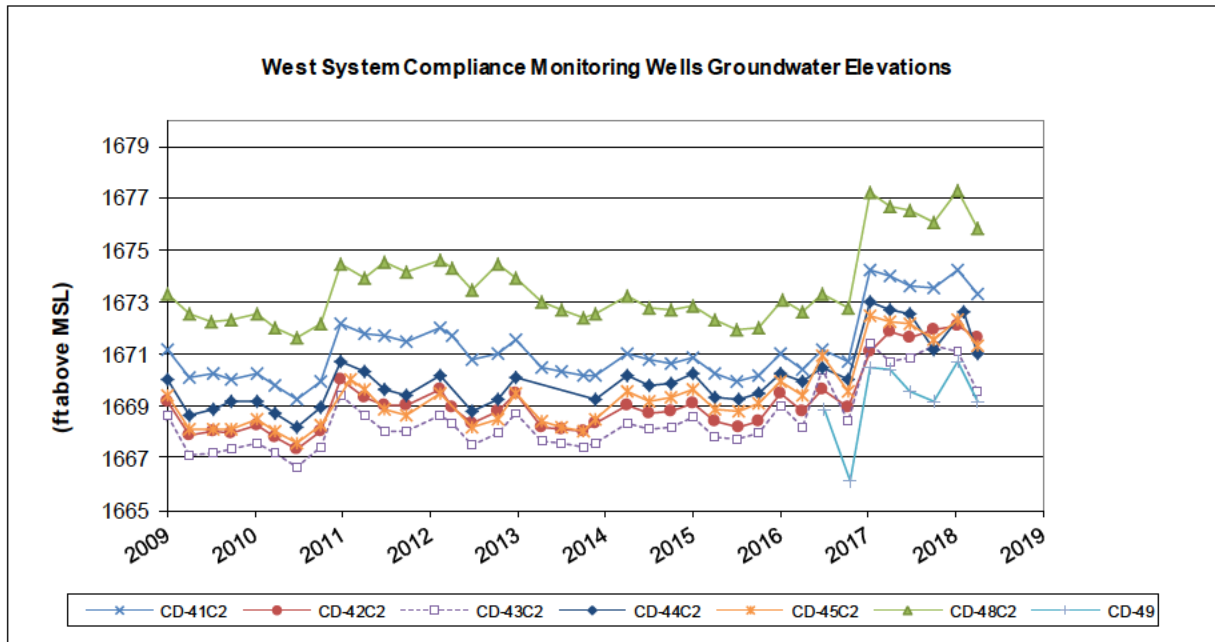


Figure 2-3 Lower Aquifer Groundwater Contours

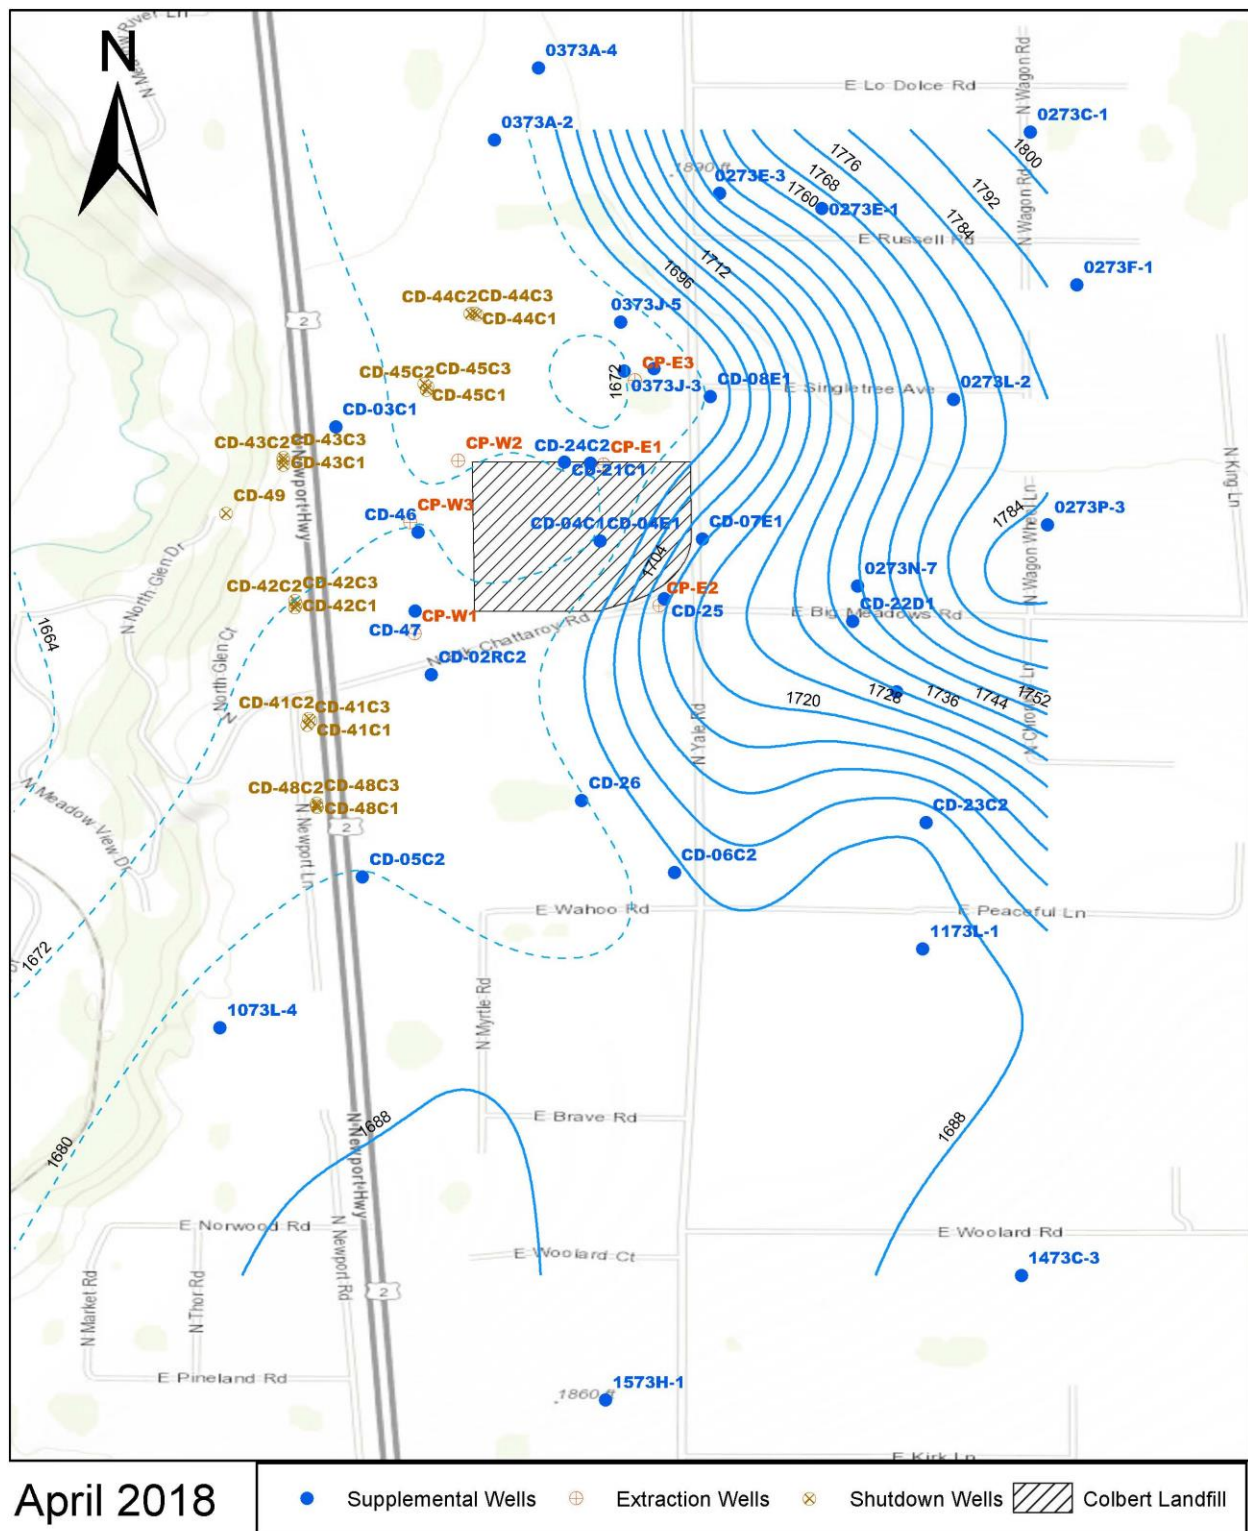


Table 2-2 Shut-down Test Location Field Parameters

StationID	SampleDate	WtrElev	FieldTemp	FieldPH	FieldConductivity	FieldTurbidity	Aquifer	Program
CD-40C1	4/18/18	1662.79	9.8	7.77	553	0.47	lower	SD
CD-41C1	4/17/18	1674.31	11.4	7.87	348	0.15	lower	SD
CD-41C1	4/18/18	1676.65	15.4	7.58	474	0.26	lower	SD
CD-41C2	4/17/18	1674.26	11.2	7.96	349	0.19	lower	SD
CD-41C3	4/17/18	1674.43	11.9	7.79	400	0.14	lower	SD
CD-42C1	4/17/18	1672.28	11.7	7.77	411	0.17	lower	SD
CD-42C2	4/17/18	1672.05	11.4	7.84	409	0.19	lower	SD
CD-42C3	4/17/18	1672.33	12.1	7.83	350	0.94	lower	SD
CD-43C1	4/17/18	1671	9.9	7.81	418	0.11	lower	SD
CD-43C2	4/17/18	1671.12	10.3	7.86	337	0.14	lower	SD
CD-43C3	4/17/18	1672.3	10.6	7.74	261	0.17	lower	SD
CD-44C2	5/9/18	1672.6	12.5	7.33	452	0.35	lower	SD
CD-44C3	5/9/18	1672.35	13.1	7.31	445	0.29	lower	SD
CD-45C1	4/18/18	1672.26	9.9	7.63	489	0.17	lower	SD
CD-45C2	4/18/18	1672.32	10.3	7.59	464	0.07	lower	SD
CD-45C3	4/18/18	1673.48	10.1	7.98	329	0.13	lower	SD
CD-48C1	4/17/18	1676.86	11.5	7.76	419	0.04	lower	SD
CD-48C2	4/17/18	1677.32	11.4	7.8	403	0.24	lower	SD
CD-48C3	4/17/18	1676.57	11.5	7.79	397	0.16	lower	SD
CD-49	7/12/17	1670.36	12.7	7.6	479	0.07	LOWER	SD
CD-49	10/4/17	1669.52	12.5	7.79	521	0.08	LOWER	SD
CD-49	1/10/18	1669.16	12.2	7.76	450	0.13	LOWER	SD
CD-49	4/17/18	1670.68	12.2	7.83	516	0.21	LOWER	SD
CP-E1	7/12/17	1673.11	12.8	7.01	1130	1.48	lower	SD
CP-E1	10/4/17	1671.91	12.6	6.97	1110	0.97	lower	SD
CP-E1	1/10/18	1671.24	11.9	7.05	1165	1.1	lower	SD
CP-E1	4/18/18	1672.32	11.7	7.06	1129	1.11	lower	SD
CP-E2	7/12/17	1714.98	14.6	6.98	1144	0.83	lower	SD
CP-E2	10/4/17	1707.28	13.9	7	1144	0.61	lower	SD
CP-E2	1/10/18	1709.75	14.1	7.07	1224	0.61	lower	SD
CP-E2	4/18/18	1709.42	12.5	7.11	1170	0.89	lower	SD
CP-E3	7/12/17	1673.27	12.3	7.14	808	1.77	lower	SD
CP-E3	10/4/17	1671.9	11.8	7.07	838	1.01	lower	SD
CP-E3	1/10/18	1671.58	11.7	7.17	812	1.41	lower	SD
CP-E3	4/18/18	1672.33	11.5	7.2	825	0.89	lower	SD
CP-W1	7/12/17	1673.04	12	7.81	474	0.89	lower	SD
CP-W1	10/4/17	1671.56	11.6	7.86	479	0.61	lower	SD
CP-W1	1/10/18	1671.2	11.4	7.87	495	0.57	lower	SD
CP-W1	4/18/18	1672.61	11.7	7.91	491	0.71	lower	SD
CP-W2	7/12/17	1672.45	10.6	7.82	491	1.01	lower	SD
CP-W2	10/4/17	1671.15	10.7	7.79	454	0.81	lower	SD
CP-W2	1/10/18	1670.57	10.9	7.9	491	0.89	lower	SD
CP-W2	4/18/18	1672.18	10	7.7	494	0.8	lower	SD
CP-W3	7/12/17	1672.17	12.1	7.41	792	1.21	lower	SD
CP-W3	10/4/17	1670.83	11.7	7.33	771	0.91	lower	SD
CP-W3	1/10/18	1670.61	11.6	7.47	794	0.89	lower	SD
CP-W3	4/18/18	1671.96	12	7.48	803	0.8	lower	SD

Temp=degrees C; Conductivity=umhos/cm; Turbidity= NTU

Table 2-3 Colbert Landfill Shut-down Test Criteria

SHUT-DOWN TEST CRITERIA		
COC	ACTION LEVEL CRITERIA (ug/L)	CONSENT DECREE EVALUATION CRITERIA (ug/L)
TCA	130	200
DCA	2632	4050
DCE	4.55	7
MC	1.6	2.5
PCE	0.5	0.7
TCE	3.25	5

Table 2-4 Shut-down Test Compliance Well Analytical Results (reported in ug/l)

StationID	SampleDate	DCA	DCE	MC	PCE	TCA	TCE
CD-40C1	4/19/2017	3.15	1.93	<0.5	<0.5	4.66	<0.5
CD-40C1	4/18/2018	1.72	<0.5	<0.5	<0.5	2.04	<0.5
CD-41C1	4/18/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-41C1	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-41C2	4/18/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-41C2	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-41C3	4/18/2017	<0.5	<0.5	<0.5	<0.5	0.84	<0.5
CD-41C3	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-42C1	4/18/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-42C1	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-42C2	4/18/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-42C2	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-42C3	4/18/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-42C3	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-43C1	4/18/2017	<0.5	<0.5	<0.5	<0.5	0.63	<0.5
CD-43C1	4/17/2018	<0.5	<0.5	<0.5	<0.5	1.45	<0.5
CD-43C2	4/18/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-43C2	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-43C3	4/18/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-43C3	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-44C1	4/19/2017	<0.5	<0.5	<0.5	<0.5	2.05	<0.5
CD-44C2	4/19/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-44C2	5/9/2018	<0.5	<0.5	<0.5	<0.5	1.93	<0.5
CD-44C3	4/19/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-44C3	5/9/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-45C1	4/19/2017	<0.5	<0.5	<0.5	<0.5	0.88	<0.5
CD-45C1	4/18/2018	<0.5	<0.5	<0.5	<0.5	1.31	<0.5
CD-45C2	4/19/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-45C2	4/18/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-45C3	4/19/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-45C3	4/18/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-48C1	4/18/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-48C1	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-48C2	4/18/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-48C2	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-48C3	4/18/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-48C3	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CD-49	4/19/2017	0.51	2.07	<0.5	<0.5	6.98	<0.5
CD-49	7/12/2017	<0.5	1.76	<0.5	<0.5	5.63	<0.5
CD-49	10/4/2017	<0.5	3.04	<0.5	<0.5	5.14	<0.5
CD-49	1/10/2018	<0.5	3.17	<0.5	<0.5	4.18	<0.5
CD-49	4/17/2018	<0.5	2.59	<0.5	<0.5	3.31	<0.5
CP-E1	4/20/2017	10.3	16	<0.5	2	9.26	7.74
CP-E1	7/12/2017	8.12	13.7	<0.5	2.57	7.18	7.48
CP-E1	10/4/2017	9.87	23.1	<0.5	2.35	9.23	8.48
CP-E1	1/10/2018	7.54	13.4	<0.5	3	5.9	7.55

Table 2-5 Lower Aquifer Extraction Well Analytical Results (reported in ug/l)

StationID	SampleDate	DCA	DCE	MC	PCE	TCA	TCE
CP-E1	4/18/2018	9.66	<0.5	<0.5	2.85	8.58	9.93
CP-E2	4/20/2017	29.9	103	<0.5	0.76	62.7	92.9
CP-E2	7/12/2017	26	101	<0.5	0.69	48.8	85.2
CP-E2	10/4/2017	30.6	135	<0.5	0.63	51.5	81.6
CP-E2	1/10/2018	26.4	107	<0.5	0.69	49.9	92.5
CP-E2	4/18/2018	38.6	<0.5	<0.5	0.69	62.3	116
CP-E3	4/20/2017	3.96	16.3	<0.5	<0.5	14.4	2.34
CP-E3	7/12/2017	2.76	13.6	<0.5	<0.5	10.1	2.36
CP-E3	10/4/2017	2.87	12.3	<0.5	<0.5	7.15	2.03
CP-E3	1/10/2018	2.51	11.9	<0.5	<0.5	6.52	2.05
CP-E3	4/18/2018	3.89	<0.5	<0.5	<0.5	7.53	3.23
CP-S1	4/19/2017	3.3	0.73	<0.5	<0.5	1.13	2.04
CP-S1	7/12/2017	2.83	0.56	<0.5	<0.5	0.88	1.82
CP-S1	10/4/2017	3.24	0.85	<0.5	<0.5	1	1.94
CP-S1	1/10/2018	2.19	0.58	<0.5	<0.5	0.72	1.65
CP-S1	4/18/2018	1.48	0.58	<0.5	<0.5	0.7	1.73
CP-S4	4/19/2017	<0.5	0.53	<0.5	0.65	0.53	1.81
CP-S4	7/12/2017	<0.5	<0.5	<0.5	<0.5	<0.5	0.79
CP-S4	10/4/2017	<0.5	<0.5	<0.5	<0.5	<0.5	1.04
CP-S4	1/10/2018	0.67	<0.5	<0.5	<0.5	<0.5	1.31
CP-S5	4/19/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CP-S5	7/12/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CP-S5	10/4/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CP-S5	1/10/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CP-S5	4/18/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CP-S6	4/20/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CP-S6	7/12/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CP-S6	10/4/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CP-S6	1/10/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CP-S6	4/18/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
CP-W1	4/20/2017	<0.5	5.06	<0.5	<0.5	6.26	<0.5
CP-W1	7/12/2017	<0.5	4.14	<0.5	<0.5	4.39	<0.5
CP-W1	10/4/2017	<0.5	3.76	<0.5	<0.5	1.9	<0.5
CP-W1	1/10/2018	<0.5	2.97	<0.5	<0.5	2.03	<0.5
CP-W1	4/18/2018	<0.5	<0.5	<0.5	<0.5	2.54	<0.5
CP-W2	4/20/2017	<0.5	<0.5	<0.5	<0.5	2.06	<0.5
CP-W2	7/12/2017	<0.5	<0.5	<0.5	<0.5	1.76	<0.5
CP-W2	10/4/2017	<0.5	0.55	<0.5	<0.5	3.98	<0.5
CP-W2	1/10/2018	<0.5	<0.5	<0.5	<0.5	4.61	<0.5
CP-W2	4/18/2018	0.78	<0.5	<0.5	<0.5	7.38	1.1
CP-W3	4/20/2017	37.1	66.8	<0.5	<0.5	88.5	40.2
CP-W3	7/12/2017	35.9	73.9	<0.5	<0.5	85.2	39.5
CP-W3	10/4/2017	26.4	66.8	<0.5	<0.5	73.3	48.4
CP-W3	1/10/2018	10.7	32.9	<0.5	<0.5	43.7	35.3
CP-W3	4/18/2018	8.87	<0.5	<0.5	<0.5	43.5	36.6

Figure 2-4 Lower Aquifer Monitoring Well COC Concentrations

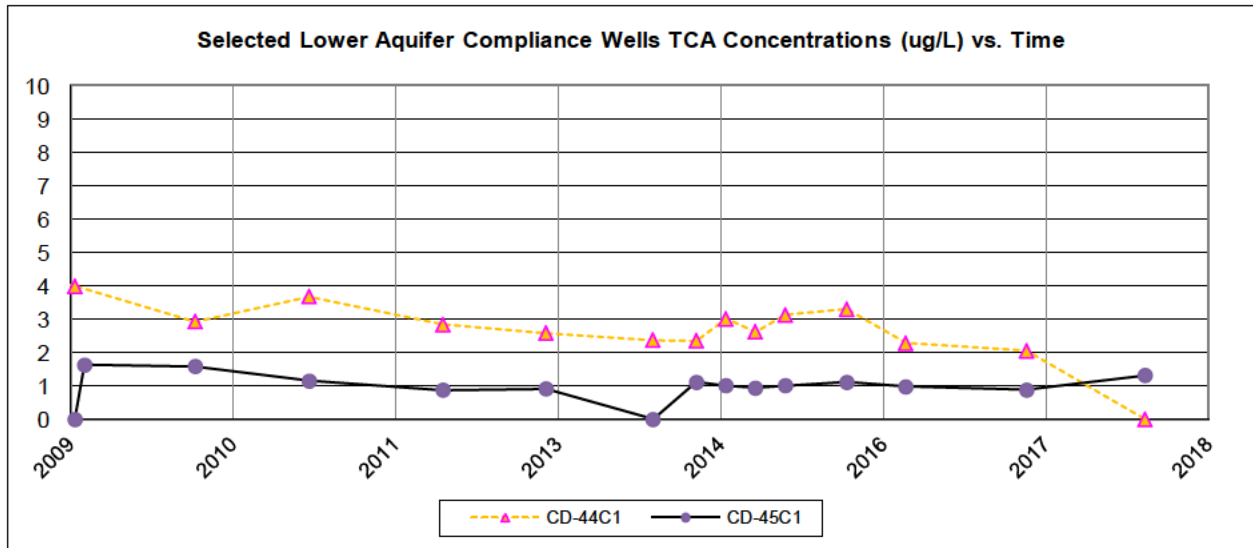
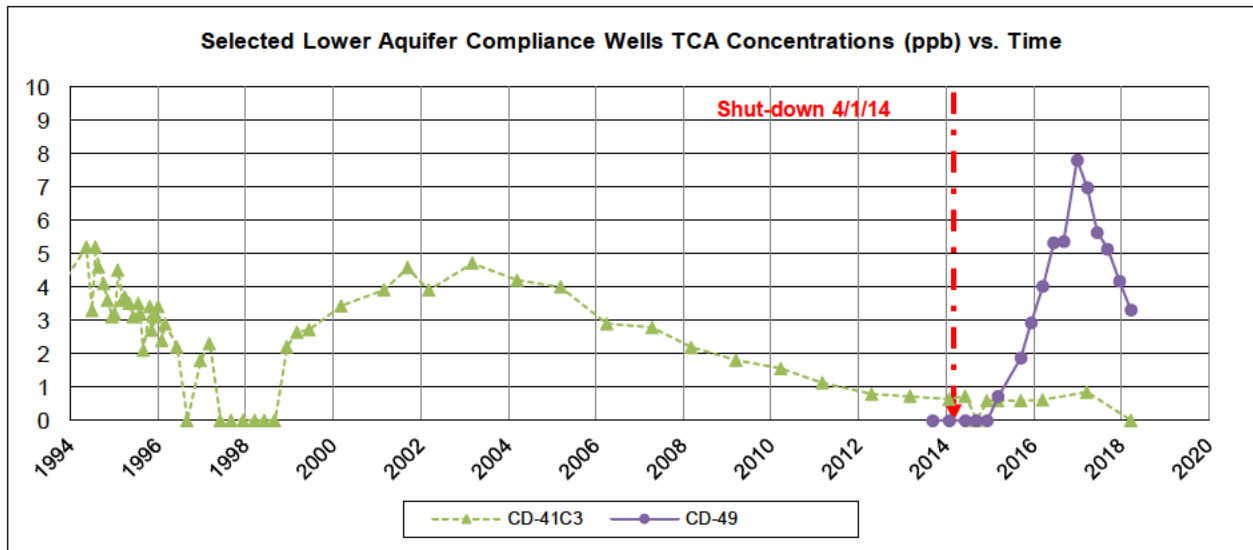


Figure 2-5 Lower Aquifer Extraction Well COC Concentrations

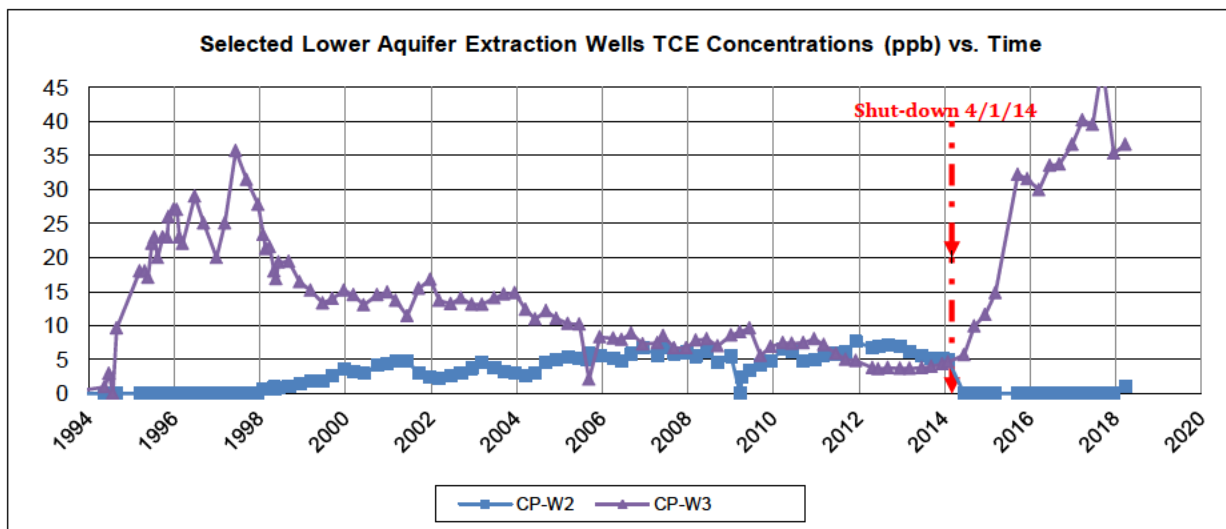
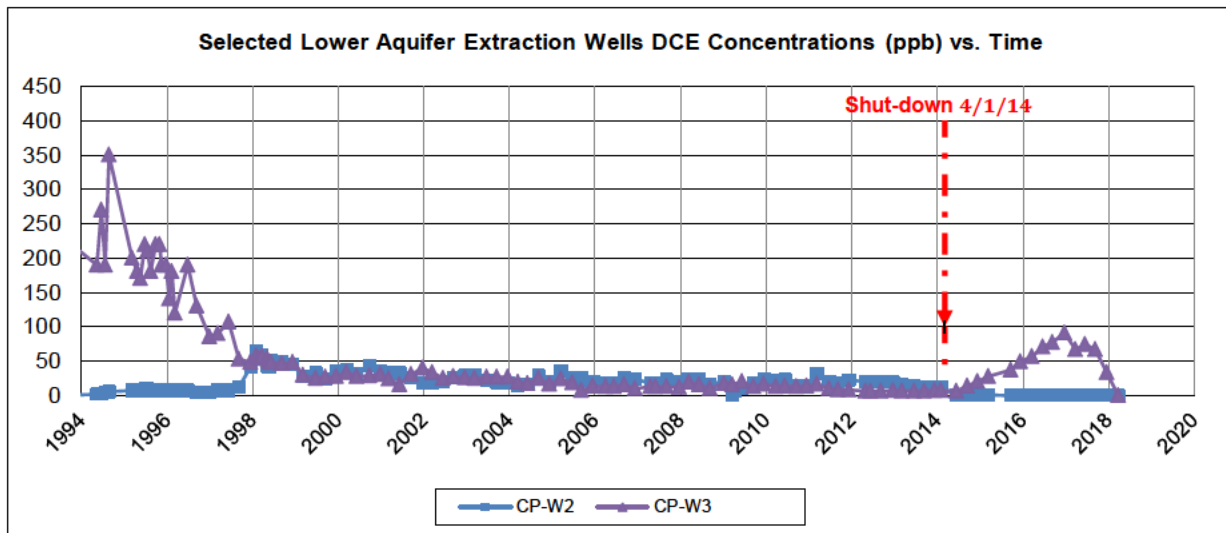
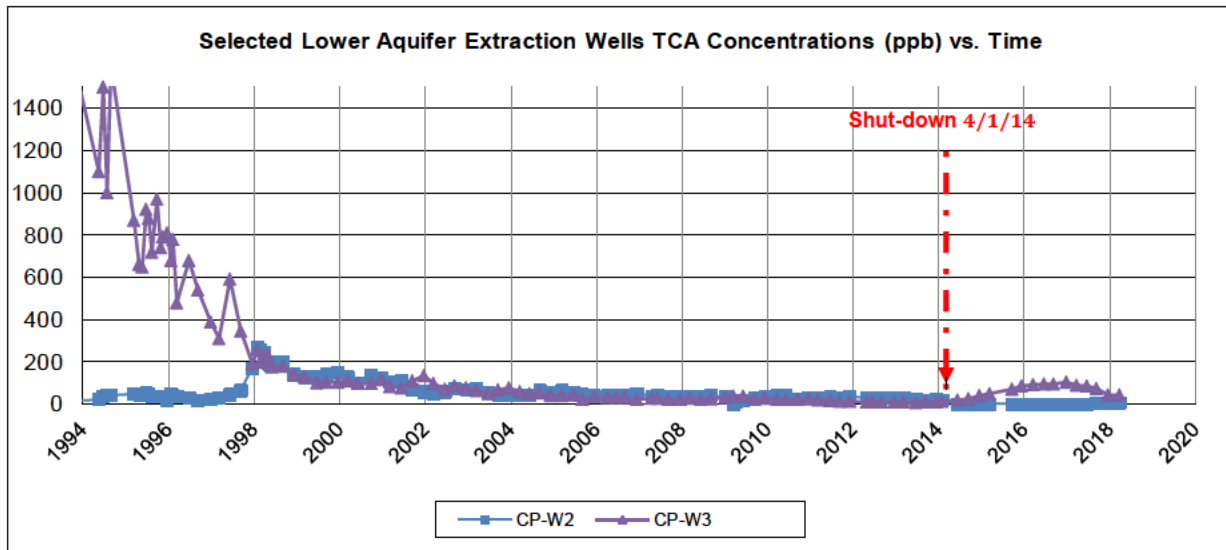


Figure 2-6 Lower Aquifer Extraction Well COC Concentrations

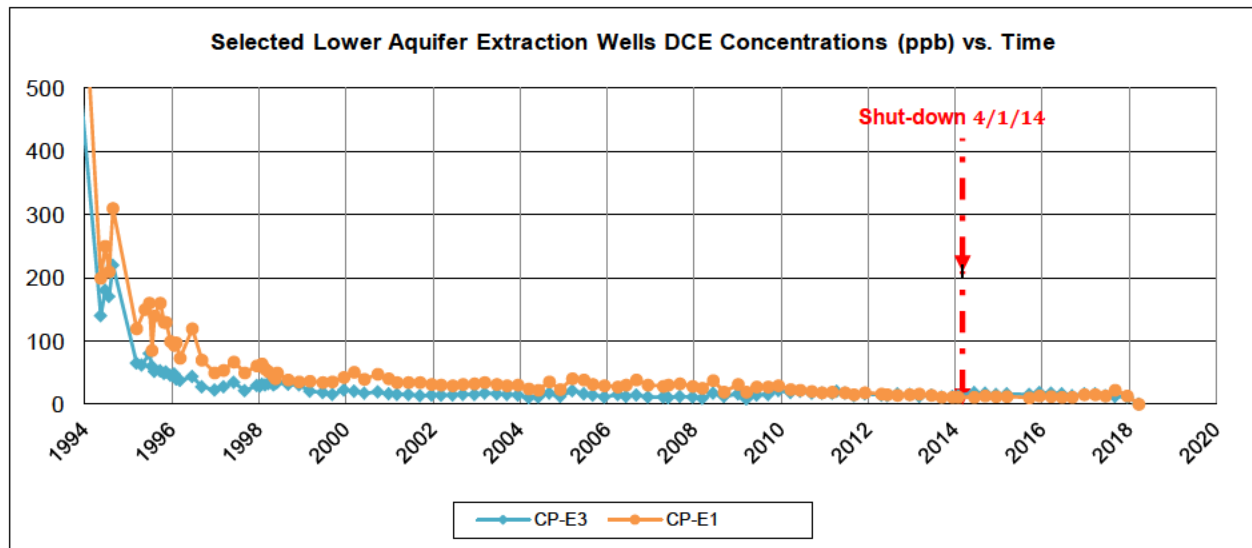
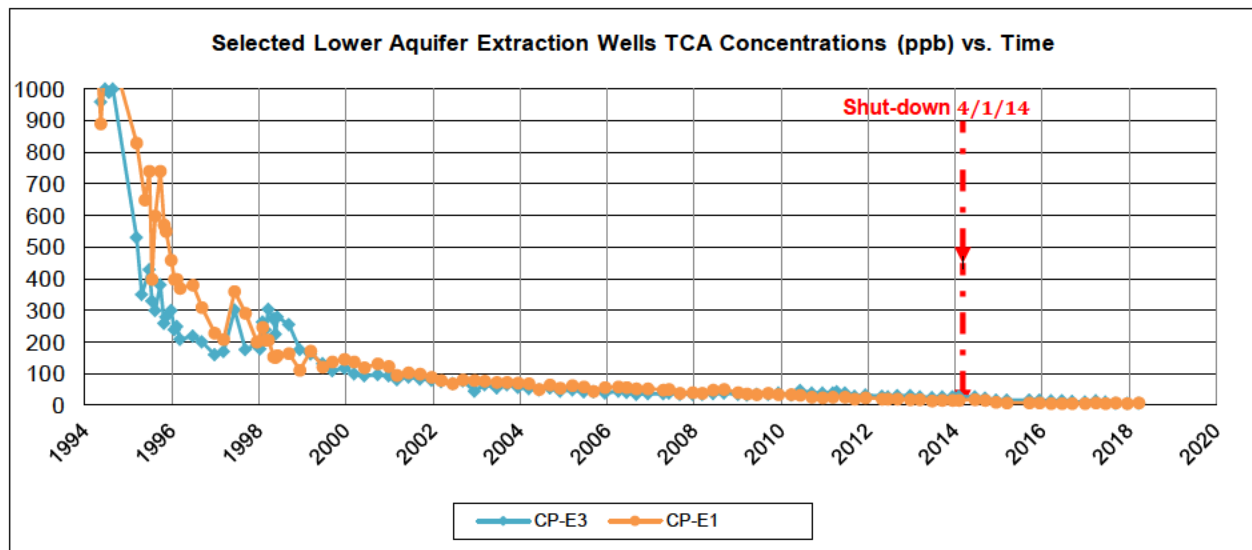


Figure 2-7 Lower Aquifer Extraction Well Concentrations




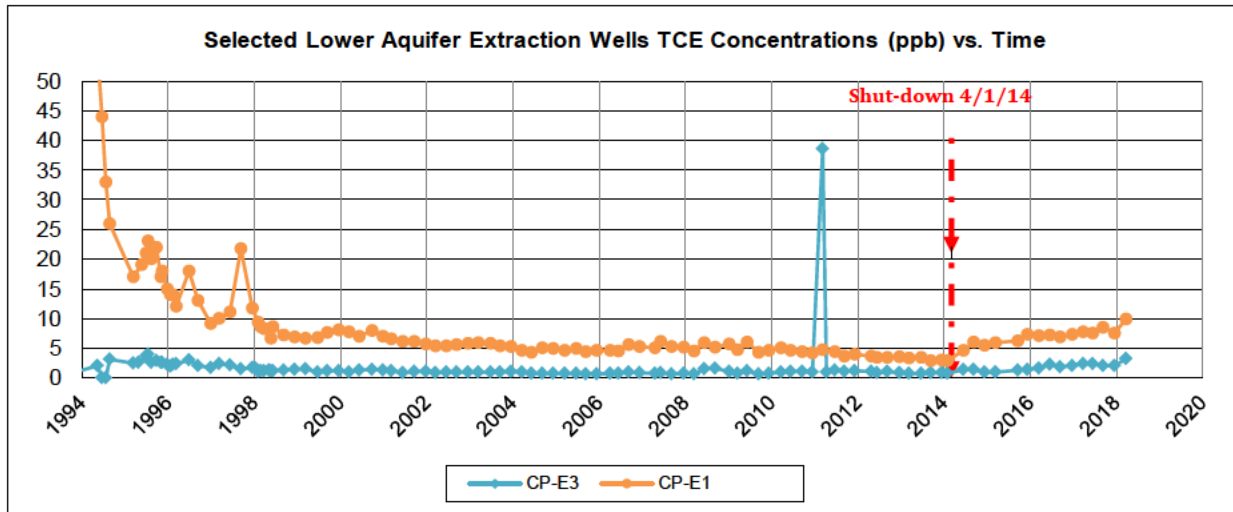


Figure 2-8 Lower Aquifer Estimated TCA Plume

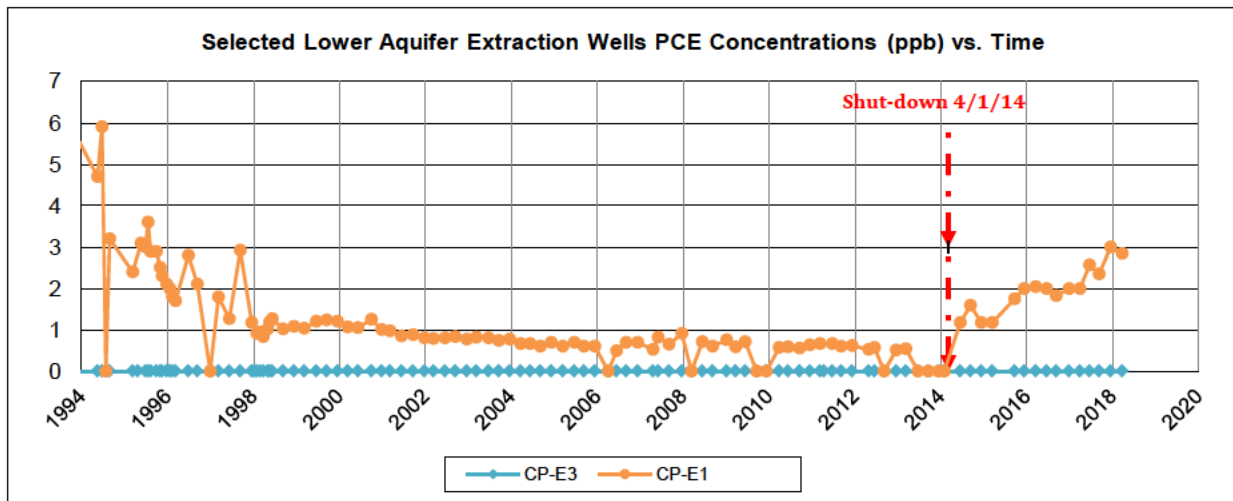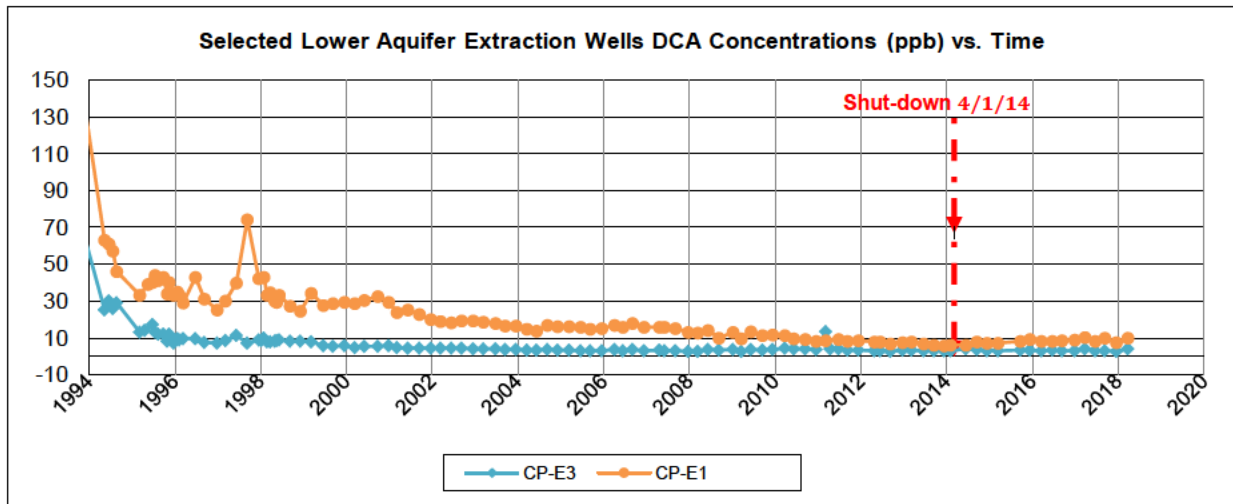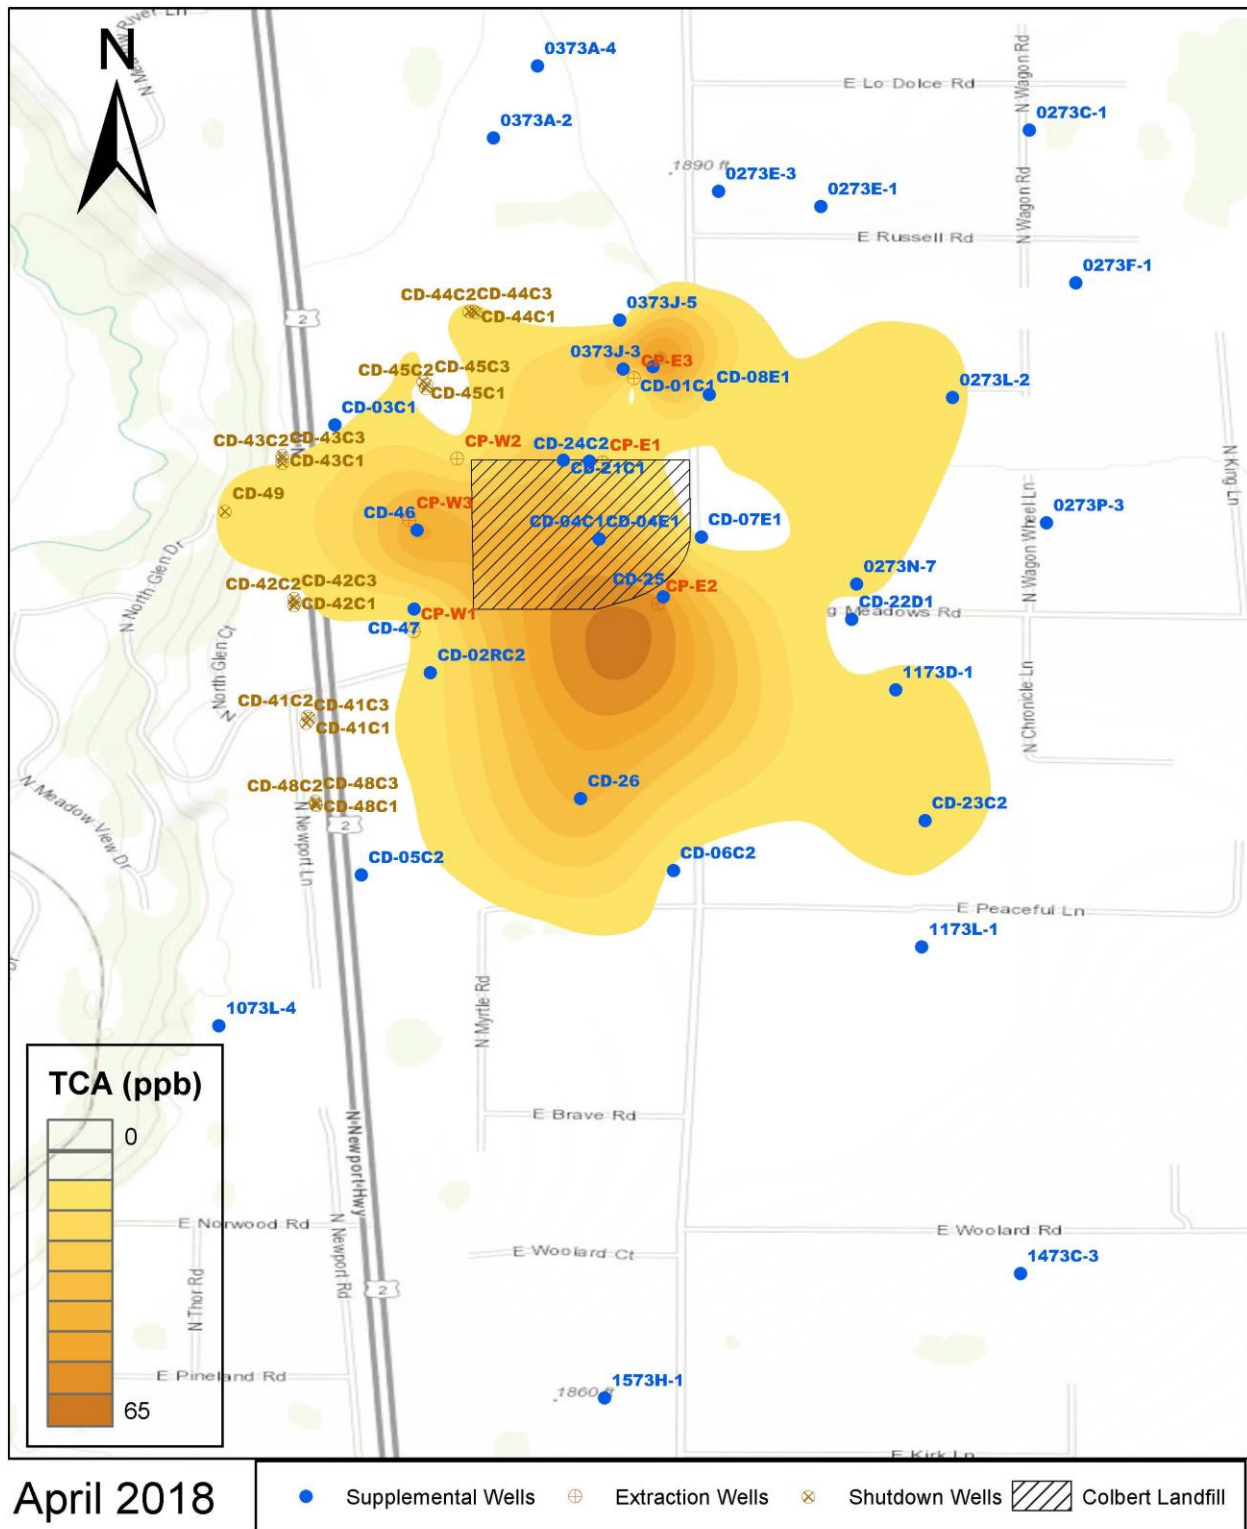

3.0 Upper Aquifer Monitoring

The upper aquifer monitoring program includes the sampling of compliance indicator COC's (VOC's), 1,4-dioxane sample collection, and MFS sampling from selected monitoring wells. Table 3-1 presents all wells located in the upper aquifer monitoring program and the sample analyses assigned to each well. Upper aquifer monitoring locations are presented in Figure 3-1. All upper aquifer monitoring occurs on an annual basis with the exception of extraction wells, which are operated and sampled quarterly.

3.1 Field Data and Groundwater Elevations

All upper aquifer compliance monitoring field parameters and groundwater elevations for this reporting period are shown in Table 3-3. Conductivity values ranged from 370 to 706 umhos/cm. Field pH values ranged from 6.54 to 7.69. Upper aquifer groundwater elevation contours and flow paths are presented in Figure 3-3.

3.2 Compliance Monitoring (VOC's)

All wells in the upper aquifer have VOC samples collected from them and analyzed, even though the VOC analysis is not required in the MFS or 1,4-Dioxane work plan specifications.

3.2.1 Chemical Data

Constituent of concern concentrations at the south system extraction wells were consistent with previous quarters (see Table 3-4). Selected upper aquifer wells TCA concentrations versus time are presented in Figure 3-4. Upper aquifer TCA plume boundaries are shown in Figure 3-5.

3.2.2 Criteria

Criteria for the upper aquifer programs are presented in Table 3-2. There were no criteria exceeded in any of the upper aquifer compliance monitoring wells or extraction wells during this reporting period.

3.3 1,4-Dioxane Sampling

As outlined in the *1,4-Dioxane Workplan for the Colbert Landfill (December 2007)*, five locations were selected for one year of Quarterly 1,4-dioxane sampling to further evaluate the extent of this analyte as well as protect residential wells at the Colbert Landfill site (see Table 3-1). In April 2009, that sample event concluded the year of quarterly sampling at these locations. Since then, Spokane County has continued sampling these wells on an annual basis. The 2018 1,4-dioxane sampling was performed during the month of April. 1073D-1 was not sampled because the resident had shut off the well.

3.3.1 Chemical Data

The results for April 2018 1,4-dioxane sampling are shown in Table 3-5. Concentrations versus time are presented Figure 3-6.

3.4 Upper Aquifer Minimal Functional Standards (MFS) Monitoring

Upper aquifer locations designated in the MFS groundwater monitoring program were sampled in April 2018.

3.4.1 Chemical Data

Concentrations of analytes tested for under MFS monitoring were consistent with previous results (see Figure 3-7 and Figure 3-8). Zinc was not detected in the MFS wells during this reporting period.

3.4.2 Criteria

None of the MFS sampling locations exceeded any of the applicable criteria during this reporting period.

3.4.3 Statistical Analysis

The MFS Groundwater Monitoring Plan (Landau Assoc., 1996) requires three statistical methods be used when evaluating groundwater Quality in accordance with MFS requirements. Time series plots were performed and discussed previously. Box plots were required after one year of data was collected. Box plots are presented in Figure 3-9.

The third statistical method required is the Mann-Whitney nonparametric significance test. The summary results for this test are presented in Table 3-6 . Although lower aquifer locations are no longer scheduled for sampling, previous results are shown here as well. A statistically significant change (less than 0.05 level of significance) from this test indicates that a difference may exist between background and downgradient wells but does not differentiate between sets. While it is true that a difference in nitrate and chloride concentrations may exist between background and downgradient wells, when taking time series plots and box plots into consideration, it is not likely these differences were due to influence by the landfill.

Table 3-1 Upper Aquifer Monitoring Programs and Locations

Program	Schedule	Parameters	Wells
Compliance Monitoring	Annual Quarterly at extraction wells	VOC's	CD-31A1, CD-34A1, CD-36A1, CD-37A1, CD-38A1, CP-S1, CP-S3, CP-S4, CP-S5, CP-S6
1,4-Dioxane Sampling	Annual	1,4-Dioxane	CP-S1, 1073D-1*, 1473M-1*, 1573A-1*, CD-40C1**
MFS Monitoring	Annual	Cl/NH3/NO2/NH3/SO4/Fe/Mn/Zn/TOC/COD	CD-03A1, CD-60A1, CD-61A1, CS-04A1

* Residential use wells

**Well considered to be screened in fluvial aquifer and COC source is from upper aquifer west of Hwy 2 (see *Phase 1 Engineering Report. Landau Assoc, 1991.*)

Table 3-2 Upper Aquifer Criteria

PROGRAM	CRITERIA	TCA	DCE	DCA	TCE	PCE	MC	1,4-Dioxane	Units
CONSENT DECREE (Compliance)	Performance	200	7	4050	5	0.7	2.5		ug/L
	Evaluation	200	7	4050	5	0.7	2.5	7	
		Cl	Fe	Mn	Zn	TOC	COD	SO4 NO3	
MFS	(mg/L)	250	0.3	0.05	5	NA	NA	250 10	mg/L

Figure 3-1 Upper Aquifer Compliance Monitoring Locations



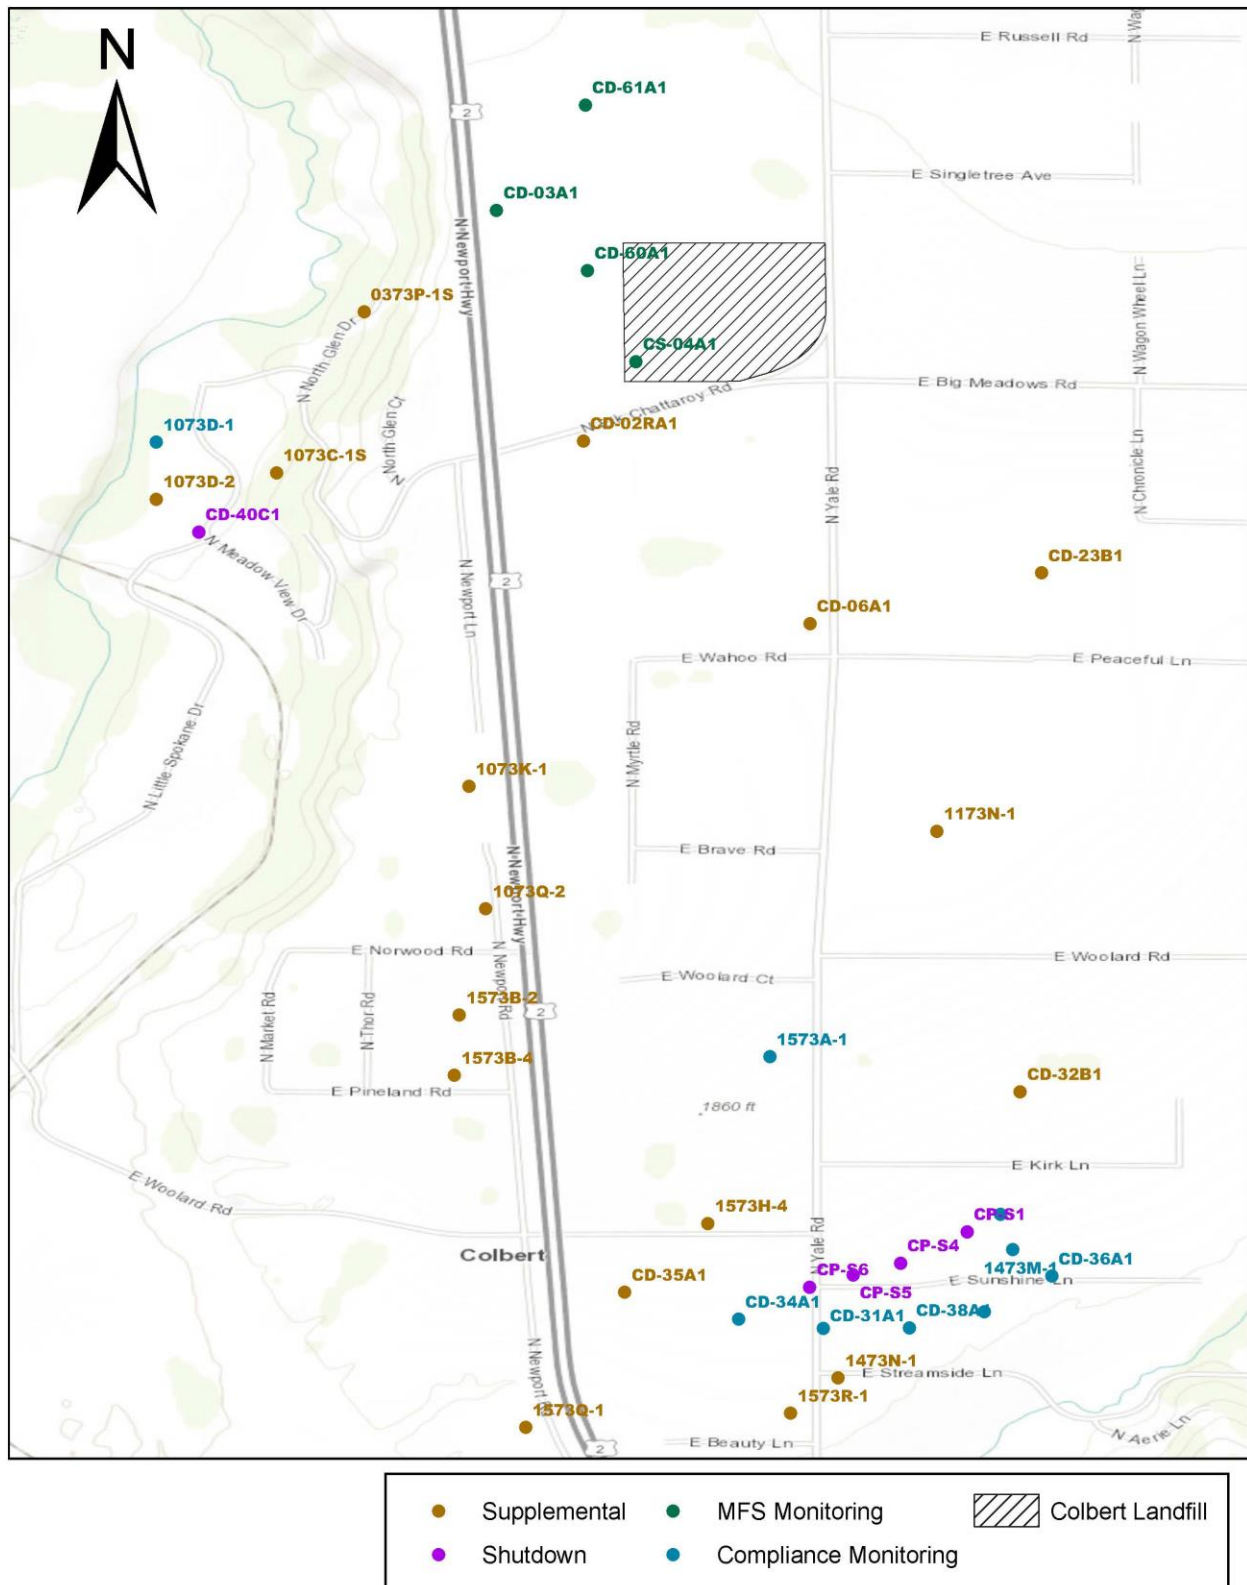


Table 3-3 Upper Aquifer Field Parameters

StationID	SampleDate	WtrElev	FieldTemp	FieldPH	FieldConductivity	FieldTurbidity	Aquifer	Program
1473M-1	4/17/18		11.5	7.52	642	0.21	upper	CCM
1573A-1	4/17/18	1763.36	10.1	7.57	608	1.68	upper	CCM
CD-31A1	4/17/18	1762.89	9	7.65	445	0.6	upper	CCM
CD-34A1	4/17/18	1763.46	9.1	7.41	592	0.4	upper	CCM
CD-36A1	4/18/18	1753.74	9.3	7.47	568	0.87	upper	CCM
CD-37A1	4/17/18	1755.66	9.8	7.55	528	0.41	upper	CCM
CD-38A1	4/17/18	1756.7	9.2	7.69	430	4.58	upper	CCM
CP-S3	4/17/18	1760.25	11.9	7.49	633	0.89	upper	CCM
CD-03A1	4/18/18	1775.28	9.2	7.56	370	0.4	upper	MFS
CD-60A1	4/18/18	1774.69	10.3	7.03	553	0.21	upper	MFS
CD-61A1	4/18/18	1776.06	9.7	7.47	417	0.18	upper	MFS
CS-04A1	4/18/18	1774.35	9.3	6.54	706	2.16	upper	MFS
CP-S1	7/12/17	1762.62	11.6	7.36	704	0.31	upper	SD
CP-S1	10/4/17	1761.47	11.5	7.33	703	0.29	upper	SD
CP-S1	1/10/18	1760.86	10.9	7.3	675	0.27	upper	SD
CP-S1	4/18/18	1759.54	11.5	7.43	703	0.29	upper	SD
CP-S4	7/12/17	1764.07	11.5	7.33	629	0.89	upper	SD
CP-S4	10/4/17	1763.48	11.5	7.31	625	0.79	upper	SD
CP-S4	1/10/18	1762.73	11.1	7.33	626	0.81	upper	SD
CP-S4	4/18/18	1761.12	11.4	7.34	630	0.79	upper	SD
CP-S5	7/12/17		12	7.49	540	1.49	upper	SD
CP-S5	10/4/17		11	7.4	519	1.11	upper	SD
CP-S5	1/10/18		12	7.45	559	1.01	upper	SD
CP-S5	4/18/18		10.8	7.53	551	1.08	upper	SD
CP-S6	7/12/17	1765.05	11.5	7.45	517	1.29	upper	SD
CP-S6	10/4/17	1764.67	11.3	7.47	506	0.89	upper	SD
CP-S6	1/10/18	1762.79	11.1	7.46	533	1.11	upper	SD
CP-S6	4/18/18	1763	10.5	7.4	515	0.98	upper	SD

Figure 3-2 Upper Aquifer Groundwater Elevations vs. Time

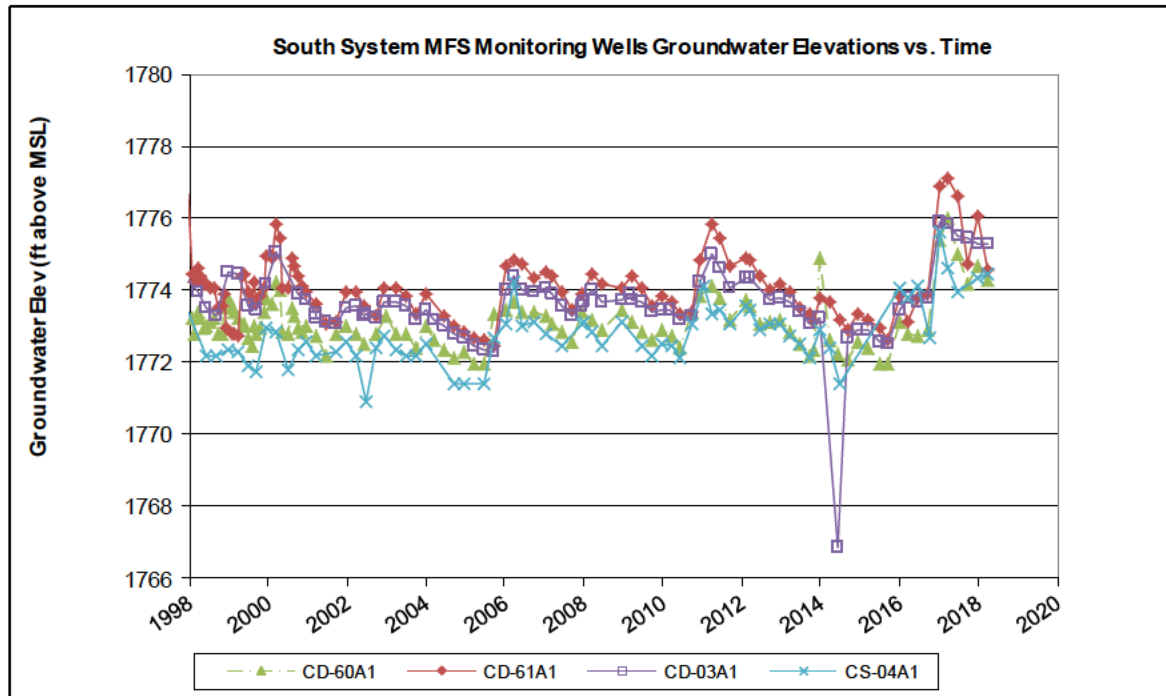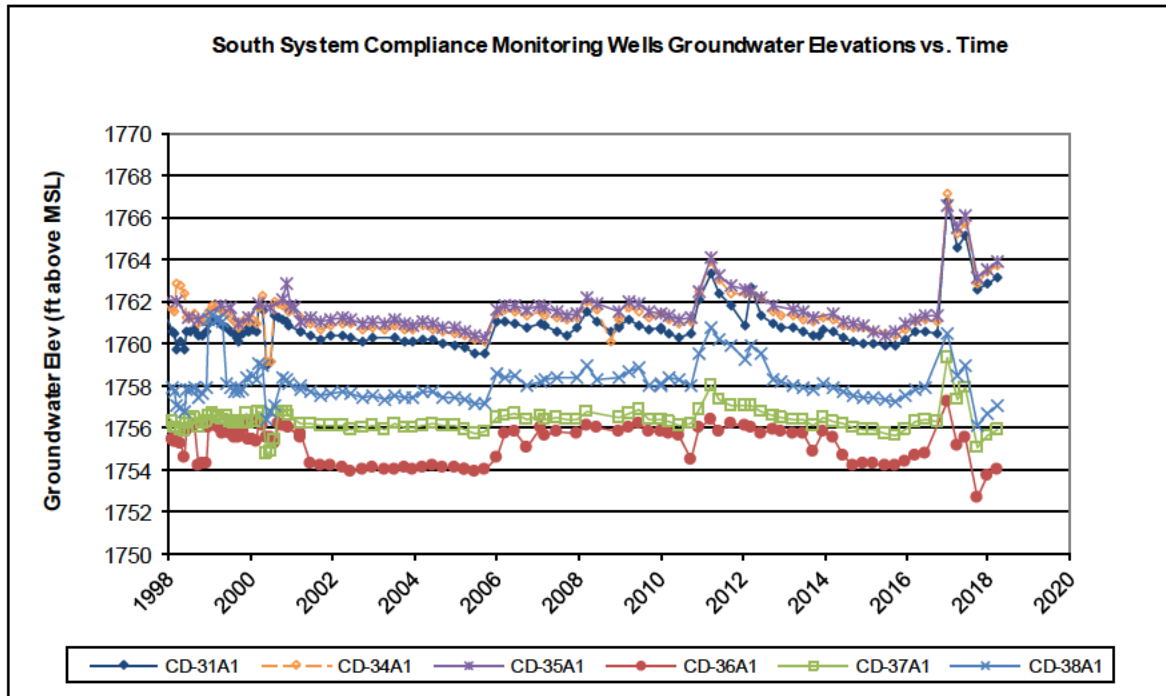

A detailed map of the study area, showing topographic contours, roads, and sampling locations. The map includes a north arrow in the top left corner. Key features include:

- Topographic Contours:** Blue lines representing elevation contours, with labels such as 1766, 1770, 1772, 1774, 1776, 1778, 1780, 1782, 1784, 1786, 1788, 1790, 1792, 1794, 1796, 1798, 1800, 1802, 1804, 1806, 1808, 1810, 1812, 1814, 1816, 1818, 1820, 1822, 1824, 1826, 1828, 1830, 1832, 1834, 1836, 1838, 1840, 1842, 1844, 1846, 1848, 1850, 1852, 1854, 1856, 1858, 1860, 1862, 1864, 1866, 1868, 1870, 1872, 1874, 1876, 1878, 1880, 1882, 1884, 1886, 1888, 1890, 1892, 1894, 1896, 1898, 1900, 1902, 1904, 1906, 1908, 1910, 1912, 1914, 1916, 1918, 1920, 1922, 1924, 1926, 1928, 1930, 1932, 1934, 1936, 1938, 1940, 1942, 1944, 1946, 1948, 1950, 1952, 1954, 1956, 1958, 1960, 1962, 1964, 1966, 1968, 1970, 1972, 1974, 1976, 1978, 1980, 1982, 1984, 1986, 1988, 1990, 1992, 1994, 1996, 1998, 2000.
- Roads:** Major roads include E Russell Rd, E Singletree Ave, E Big Meadows Rd, E Peaceful Ln, E Woolard Rd, E Norwood Rd, E Pineland Rd, E Woolard Rd, E Beauty Ln, E Streamside Ln, E Aerie Ln, N Chronicle Ln, N Wagon Wheel Ln, N Wa, N York Ln, N Sunshine Ln, N Streamside Ln, N Aerie Ln, N Market Rd, N Thor Rd, N Pineland Rd, N Woolard Rd, N Newport Hwy, N North Glen Dr, N North Glen Ct, N Meadow View Dr, N Little Spokane Dr, N Yale Rd, N Myrtle Rd, N Brave Rd, N Woolard Ct, N Norwood Rd, N Pineland Rd, N Woolard Rd, N Beauty Ln, N Streamside Ln, N Aerie Ln.
- Sampling Locations:** Numerous points are marked with colored dots and labeled with codes:
 - CD-61A1 (green)
 - CD-03A1 (green)
 - CD-60A1 (green)
 - CD-04A1 (green)
 - CD-02RA1 (orange)
 - CD-06A1 (orange)
 - CD-23B1 (orange)
 - CD-32B1 (orange)
 - CD-35A1 (orange)
 - CD-34A1 (blue)
 - CD-31A1 (blue)
 - CD-38A1 (blue)
 - CD-36A1 (blue)
 - CD-40C1 (purple)
 - CD-40C2 (purple)
 - CD-40C3 (purple)
 - CD-40C4 (purple)
 - CD-40C5 (purple)
 - CD-40C6 (purple)
 - CD-40C7 (purple)
 - CD-40C8 (purple)
 - CD-40C9 (purple)
 - CD-40C10 (purple)
 - CD-40C11 (purple)
 - CD-40C12 (purple)
 - CD-40C13 (purple)
 - CD-40C14 (purple)
 - CD-40C15 (purple)
 - CD-40C16 (purple)
 - CD-40C17 (purple)
 - CD-40C18 (purple)
 - CD-40C19 (purple)
 - CD-40C20 (purple)
 - CD-40C21 (purple)
 - CD-40C22 (purple)
 - CD-40C23 (purple)
 - CD-40C24 (purple)
 - CD-40C25 (purple)
 - CD-40C26 (purple)
 - CD-40C27 (purple)
 - CD-40C28 (purple)
 - CD-40C29 (purple)
 - CD-40C30 (purple)
 - CD-40C31 (purple)
 - CD-40C32 (purple)
 - CD-40C33 (purple)
 - CD-40C34 (purple)
 - CD-40C35 (purple)
 - CD-40C36 (purple)
 - CD-40C37 (purple)
 - CD-40C38 (purple)
 - CD-40C39 (purple)
 - CD-40C40 (purple)
 - CD-40C41 (purple)
 - CD-40C42 (purple)
 - CD-40C43 (purple)
 - CD-40C44 (purple)
 - CD-40C45 (purple)
 - CD-40C46 (purple)
 - CD-40C47 (purple)
 - CD-40C48 (purple)
 - CD-40C49 (purple)
 - CD-40C50 (purple)
 - CD-40C51 (purple)
 - CD-40C52 (purple)
 - CD-40C53 (purple)
 - CD-40C54 (purple)
 - CD-40C55 (purple)
 - CD-40C56 (purple)
 - CD-40C57 (purple)
 - CD-40C58 (purple)
 - CD-40C59 (purple)
 - CD-40C60 (purple)
 - CD-40C61 (purple)
 - CD-40C62 (purple)
 - CD-40C63 (purple)
 - CD-40C64 (purple)
 - CD-40C65 (purple)
 - CD-40C66 (purple)
 - CD-40C67 (purple)
 - CD-40C68 (purple)
 - CD-40C69 (purple)
 - CD-40C70 (purple)
 - CD-40C71 (purple)
 - CD-40C72 (purple)
 - CD-40C73 (purple)
 - CD-40C74 (purple)
 - CD-40C75 (purple)
 - CD-40C76 (purple)
 - CD-40C77 (purple)
 - CD-40C78 (purple)
 - CD-40C79 (purple)
 - CD-40C80 (purple)
 - CD-40C81 (purple)
 - CD-40C82 (purple)
 - CD-40C83 (purple)
 - CD-40C84 (purple)
 - CD-40C85 (purple)
 - CD-40C86 (purple)
 - CD-40C87 (purple)
 - CD-40C88 (purple)
 - CD-40C89 (purple)
 - CD-40C90 (purple)
 - CD-40C91 (purple)
 - CD-40C92 (purple)
 - CD-40C93 (purple)
 - CD-40C94 (purple)
 - CD-40C95 (purple)
 - CD-40C96 (purple)
 - CD-40C97 (purple)
 - CD-40C98 (purple)
 - CD-40C99 (purple)
 - CD-40C100 (purple)
 - CD-40C101 (purple)
 - CD-40C102 (purple)
 - CD-40C103 (purple)
 - CD-40C104 (purple)
 - CD-40C105 (purple)
 - CD-40C106 (purple)
 - CD-40C107 (purple)
 - CD-40C108 (purple)
 - CD-40C109 (purple)
 - CD-40C110 (purple)
 - CD-40C111 (purple)
 - CD-40C112 (purple)
 - CD-40C113 (purple)
 - CD-40C114 (purple)
 - CD-40C115 (purple)
 - CD-40C116 (purple)
 - CD-40C117 (purple)
 - CD-40C118 (purple)
 - CD-40C119 (purple)
 - CD-40C120 (purple)
 - CD-40C121 (purple)
 - CD-40C122 (purple)
 - CD-40C123 (purple)
 - CD-40C124 (purple)
 - CD-40C125 (purple)
 - CD-40C126 (purple)
 - CD-40C127 (purple)
 - CD-40C128 (purple)
 - CD-40C129 (purple)
 - CD-40C130 (purple)
 - CD-40C131 (purple)
 - CD-40C132 (purple)
 - CD-40C133 (purple)
 - CD-40C134 (purple)
 - CD-40C135 (purple)
 - CD-40C136 (purple)
 - CD-40C137 (purple)
 - CD-40C138 (purple)
 - CD-40C139 (purple)
 - CD-40C140 (purple)
 - CD-40C141 (purple)
 - CD-40C142 (purple)
 - CD-40C143 (purple)
 - CD-40C144 (purple)
 - CD-40C145 (purple)
 - CD-40C146 (purple)
 - CD-40C147 (purple)
 - CD-40C148 (purple)
 - CD-40C149 (purple)
 - CD-40C150 (purple)
 - CD-40C151 (purple)
 - CD-40C152 (purple)
 - CD-40C153 (purple)
 - CD-40C154 (purple)
 - CD-40C155 (purple)
 - CD-40C156 (purple)
 - CD-40C157 (purple)
 - CD-40C158 (purple)
 - CD-40C159 (purple)
 - CD-40C160 (purple)
 - CD-40C161 (purple)
 - CD-40C162 (purple)
 - CD-40C163 (purple)
 - CD-40C164 (purple)
 - CD-40C165 (purple)
 - CD-40C166 (purple)
 - CD-40C167 (purple)
 - CD-40C168 (purple)
 - CD-40C169 (purple)
 - CD-40C170 (purple)
 - CD-40C171 (purple)
 - CD-40C172 (purple)
 - CD-40C173 (purple)
 - CD-40C174 (purple)
 - CD-40C175 (purple)
 - CD-40C176 (purple)
 - CD-40C177 (purple)
 - CD-40C178 (purple)
 - CD-40C179 (purple)
 - CD-40C180 (purple)
 - CD-40C181 (purple)
 - CD-40C182 (purple)
 - CD-40C183 (purple)
 - CD-40C184 (purple)
 - CD-40C185 (purple)
 - CD-40C186 (purple)
 - CD-40C187 (purple)
 - CD-40C188 (purple)
 - CD-40C189 (purple)</

● Supplemental ● MFS Monitoring  Colbert Landfill
● Shutdown ● Compliance Monitoring

Table 3-4 Upper Aquifer Groundwater Monitoring Results



StationID	SampleDate	DCA	DCE	MC	PCE	TCA	TCE	Cl	COD	Fe	Mn	N-NH3	N-NO3	SO4	TOC	Zn
1573A-1	4/17/2018	0.84	<0.5	<0.5	<0.5	1.18	0.56									
CD-03A1	4/18/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	0.95	<5	<0.1	<0.008	<0.03	0.433	6.61	<1	<0.01
CD-31A1	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CD-34A1	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CD-36A1	4/18/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CD-37A1	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CD-38A1	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CD-60A1	4/18/2018	<0.5	<0.5	<0.5	0.61	<0.5	<0.5	3.16	<5	<0.1	<0.008	<0.03	1.11	6.11	<1	<0.01
CD-61A1	4/18/2018	<0.5	<0.5	<0.5	<0.5	1.98	<0.5	0.58	<5	<0.1	<0.008	<0.03	0.143	8.96	<1	<0.01
CP-S1	7/12/2017	2.83	0.56	<0.5	<0.5	0.88	1.82									
CP-S1	10/4/2017	3.24	0.85	<0.5	<0.5	1	1.94									
CP-S1	1/10/2018	2.19	0.58	<0.5	<0.5	0.72	1.65									
CP-S1	4/18/2018	1.48	0.58	<0.5	<0.5	0.7	1.73									
CP-S3	4/17/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CP-S4	7/12/2017	<0.5	<0.5	<0.5	<0.5	<0.5	0.79									
CP-S4	10/4/2017	<0.5	<0.5	<0.5	<0.5	<0.5	1.04									
CP-S4	1/10/2018	0.67	<0.5	<0.5	<0.5	<0.5	1.31									
CP-S5	7/12/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CP-S5	10/4/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CP-S5	1/10/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CP-S5	4/18/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CP-S6	7/12/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CP-S6	10/4/2017	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CP-S6	1/10/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CP-S6	4/18/2018	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5									
CS-04A1	4/18/2018	0.61	<0.5	<0.5	<0.5	<0.5	0.55	2.08	<5	<0.1	<0.008	<0.03	0.077	6.21	1.28	<0.01

Table 3-5 1,4-Dioxane Monitoring Results

Aquifer	StationID	SampleDate	Analyte	Result	Reporting Limit	Qualifier	Units
upper	CP-S1	4/18/2018	1,4-Dioxane	3.4	2.0		ug/L
lower	CD-40C1	4/18/8018	1,4-Dioxane	2.0	2.0		ug/L
upper	1473M-1	4/17/2018	1,4-Dioxane	< 2.0	2.0	U	ug/L
upper	1573A-1	10/9/2018	1,4-Dioxane	< 2.0	2.0	U	ug/L
upper	*1073D-1	N/A	1,4-Dioxane	N/A	N/A	N/A	N/A

* Could not sample well 1073D-1 due to the owner(s) selling the house. Owner lives out of town, the pump house was locked, and the water was turned off.

Figure 3-4 Upper Aquifer COC Concentrations vs Time

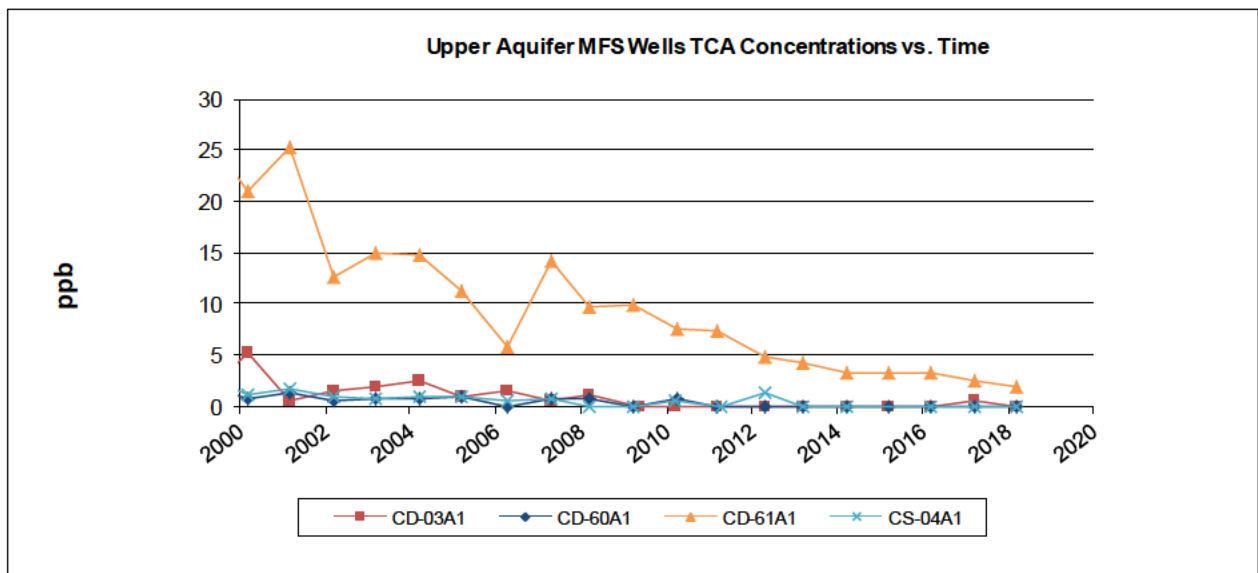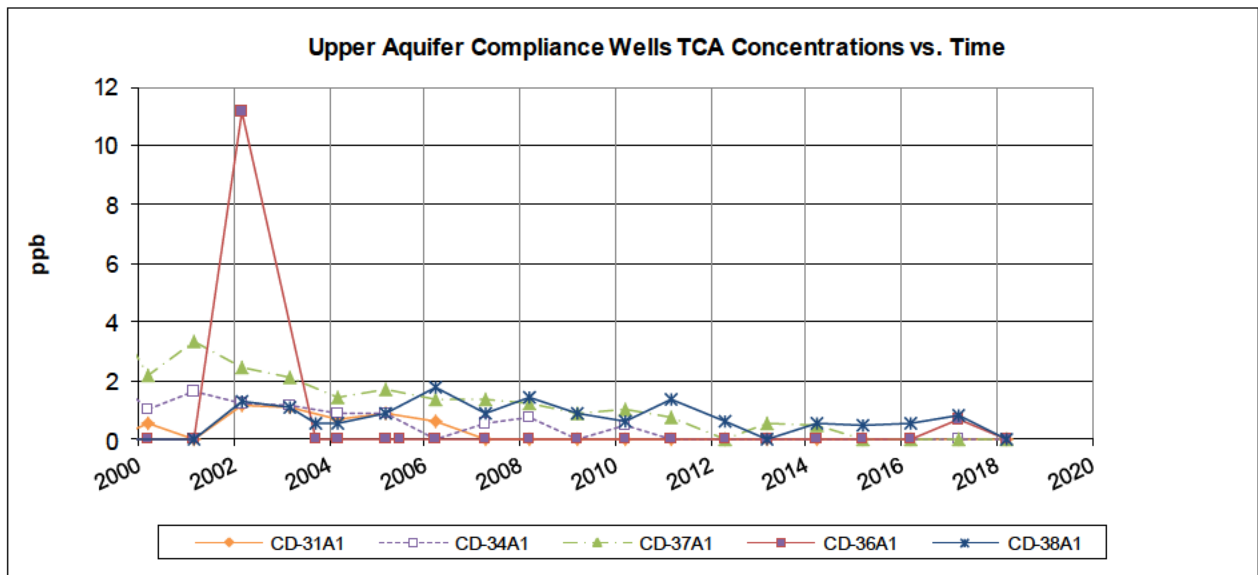

TCA (ppb)

0
2.5

April 2018

- Supplemental
- MFS Monitoring
- Shutdown
- Compliance Monitoring
- Colbert Landfill

Figure 3-6 1,4-Dioxane Concentrations vs Time

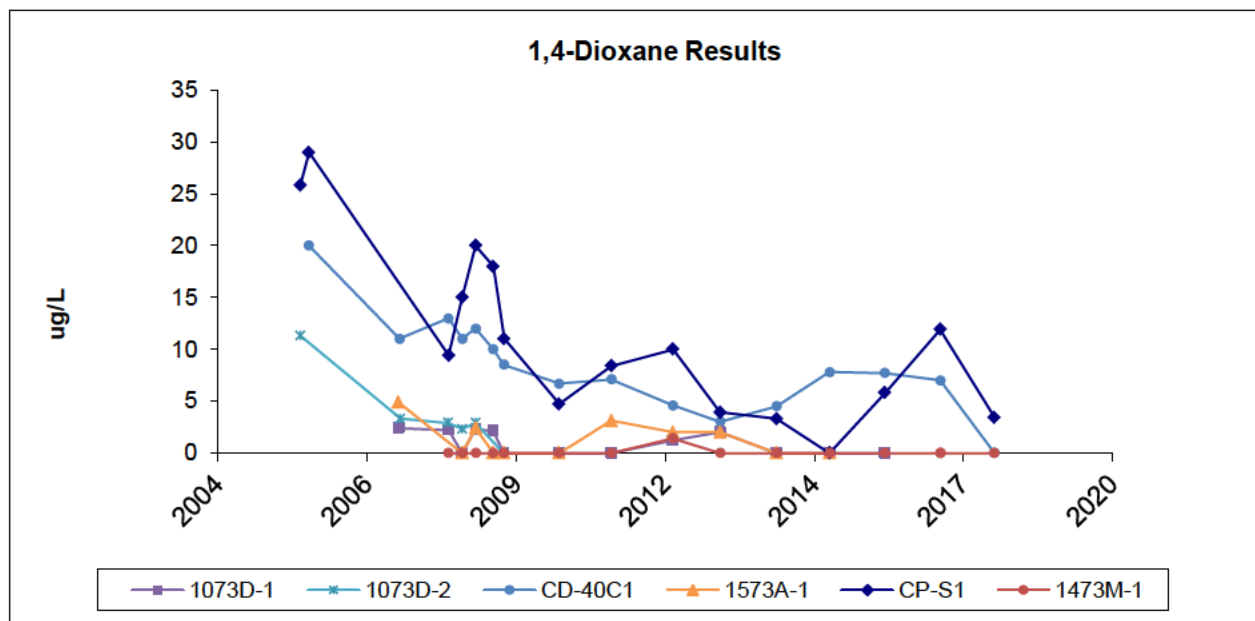


Figure 3-7 Upper Aquifer MFS Parameters vs Time

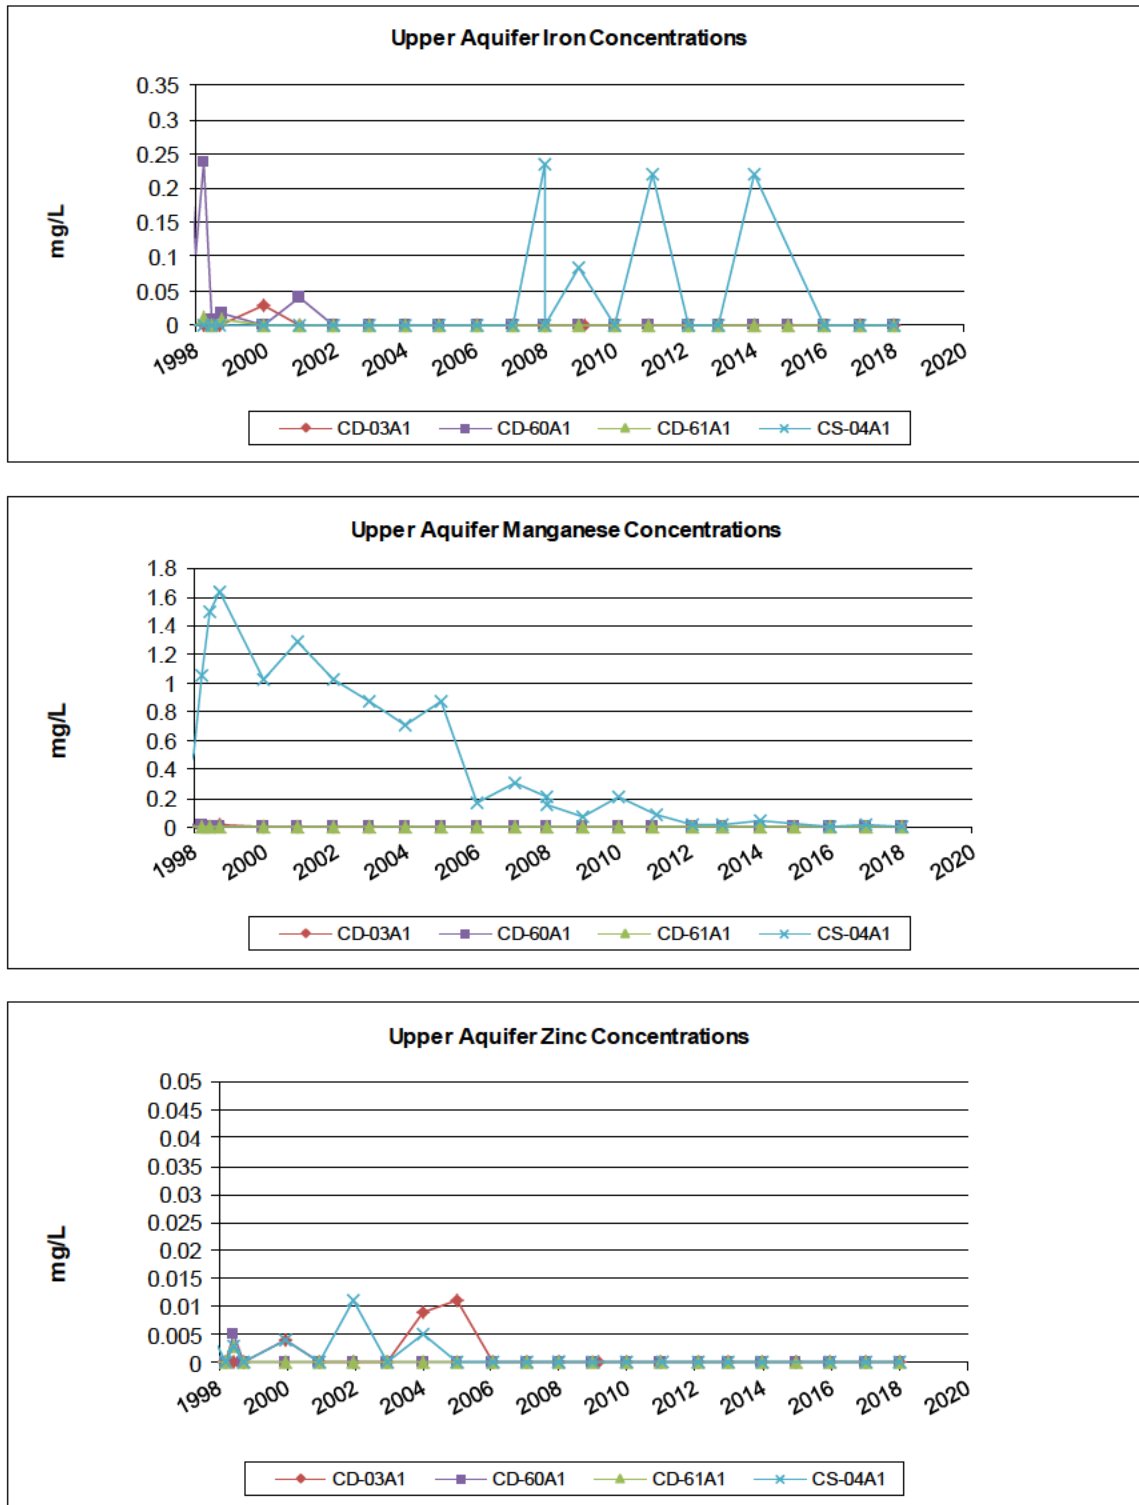


Figure 3-8 Upper Aquifer MFS Parameters vs Time

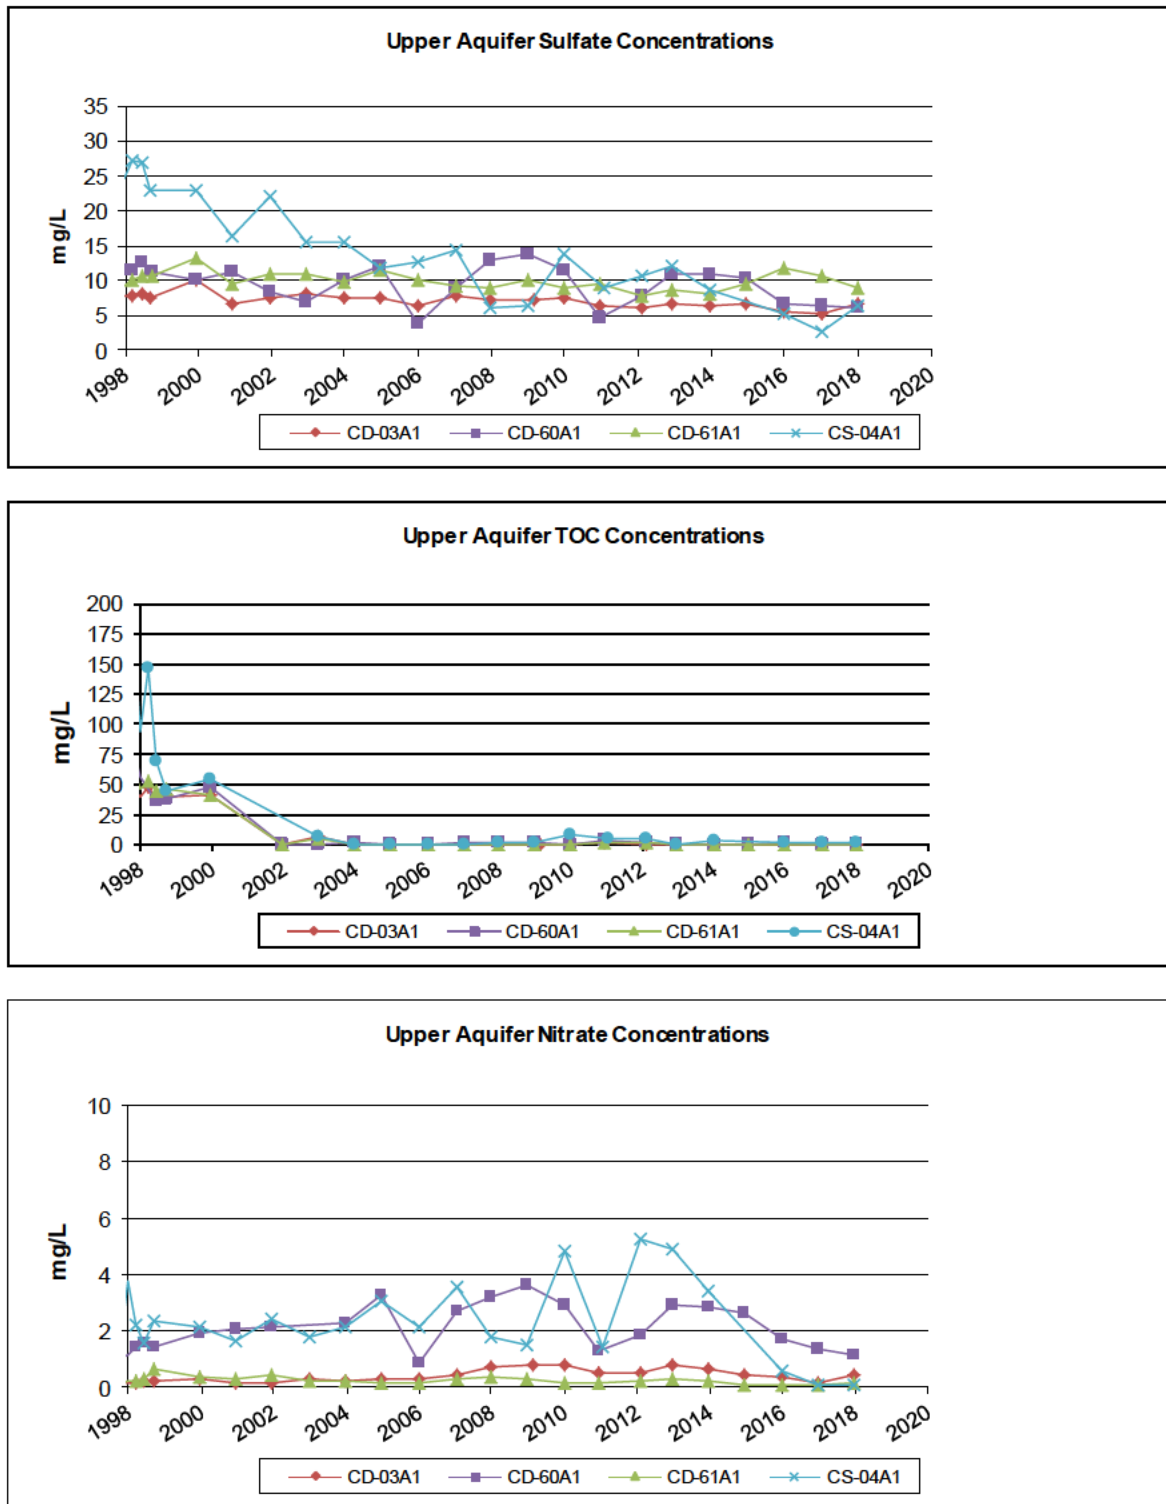


Table 3-6 Summary Results for the Mann-Whitney Nonparametric Significance Test (2018)

Constituent	Level of Significance (p)	
	Upper Aquifer	*Lower Aquifer (1999)
Chloride	5.17e-05	0.006
Chemical Oxygen Demand	0.463	0.48
Iron	0.145	0.17
Manganese	0.0628	0.86
Ammonia	0.471	0.42
Nitrite	0.430	1.13
Nitrate	7.69e-06	0.08
Sulfate	0.808	0.0006
Total Organic Carbon	0.714	0.32
Zinc	0.063	0.06

*Lower aquifer results from January 1999 using CP-E2 and CD-48C2 analytical results for calculations.

Bold number indicates a level of significance under 0.05, test run as two-tailed method

Figure 3-9 Box Plots for Background and Downgradient MFS Wells (2018)


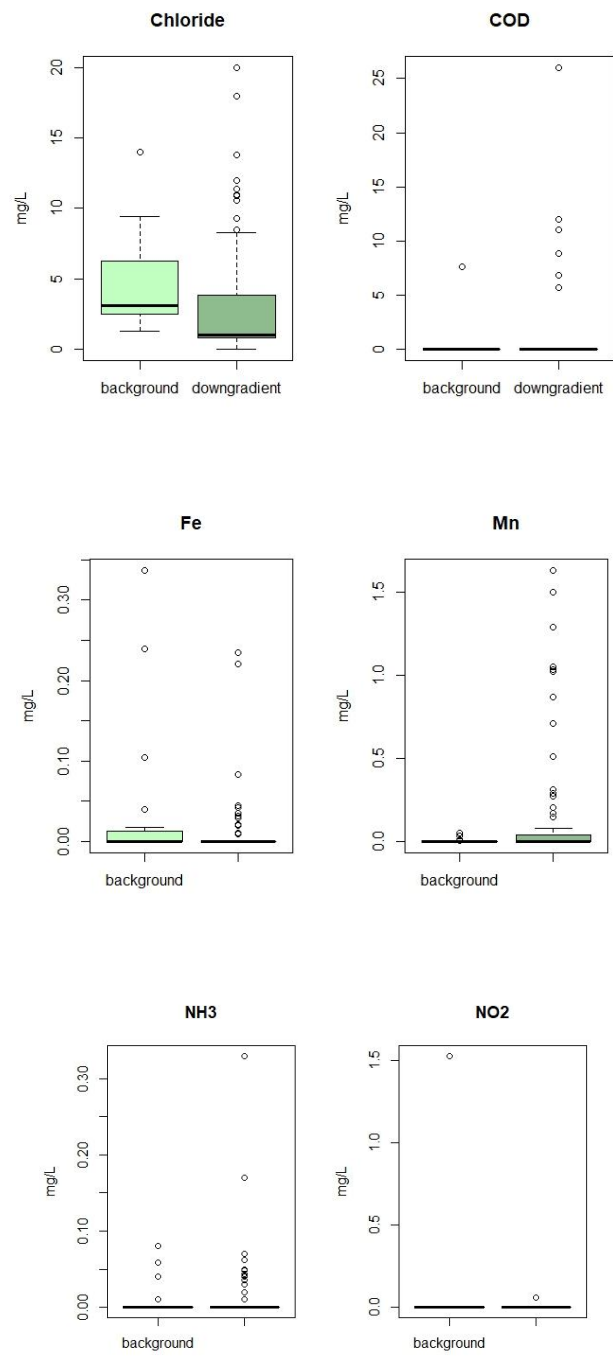


Figure 4-9 continued

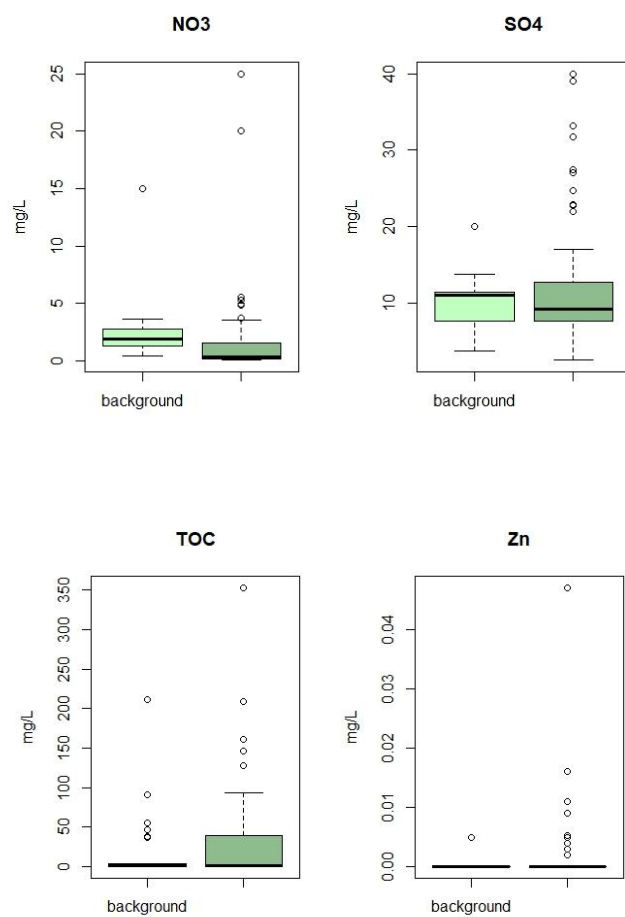

4.0 Residential Program

4.1 Locations and Schedule

Current residential well sampling locations can be found in Figure 4-1. The residential sampling schedule is included in Table 4-1.

4.2 Monitoring Results and Criteria

Criteria for residential use wells were established in the Consent Decree. The Consent Decree states that if any residential well with a concentration over the evaluation criteria OR any residential well that has an average concentration over 65% of the evaluation criteria over a 12 month period, the county shall supply that residence with an alternative water source.

All residential well results were well below established criteria. Results from sampling are presented in Table 4-2. Time series plots for wells with COC detections are shown in Figure 4-2.

4.3 Data Evaluation

Only two of the residential wells measured concentrations above the method detection limits for the 2017-2018 sampling year (June 2017). These detections were only slightly above the detection limit and far below any criteria.

4.4 Program Modifications

On a regular basis, the program schedule is re-evaluated to determine if any changes are needed. With the initiation of the Shut-down test, a re-evaluation was performed comparing plume maps and well locations as well as a list of residences connected to a public water supply. Some modifications to increase sampling in specific areas were made to the schedule to ensure a conservative approach with regard to public health.

No modifications have been made to the schedule for the upcoming 2017-2018 sampling year. However, minor adjustments can be made to the schedule to temporarily increase monitoring in the area just west of the landfill near the Little Spokane River if needed to monitor very low concentration changes in DCA and TCE if measured. Changes are not required by any documentation or work plan.

The 2018 residential well sampling schedule is presented in Table 4-3.

Figure 4-1 Residential Well Sampling Locations

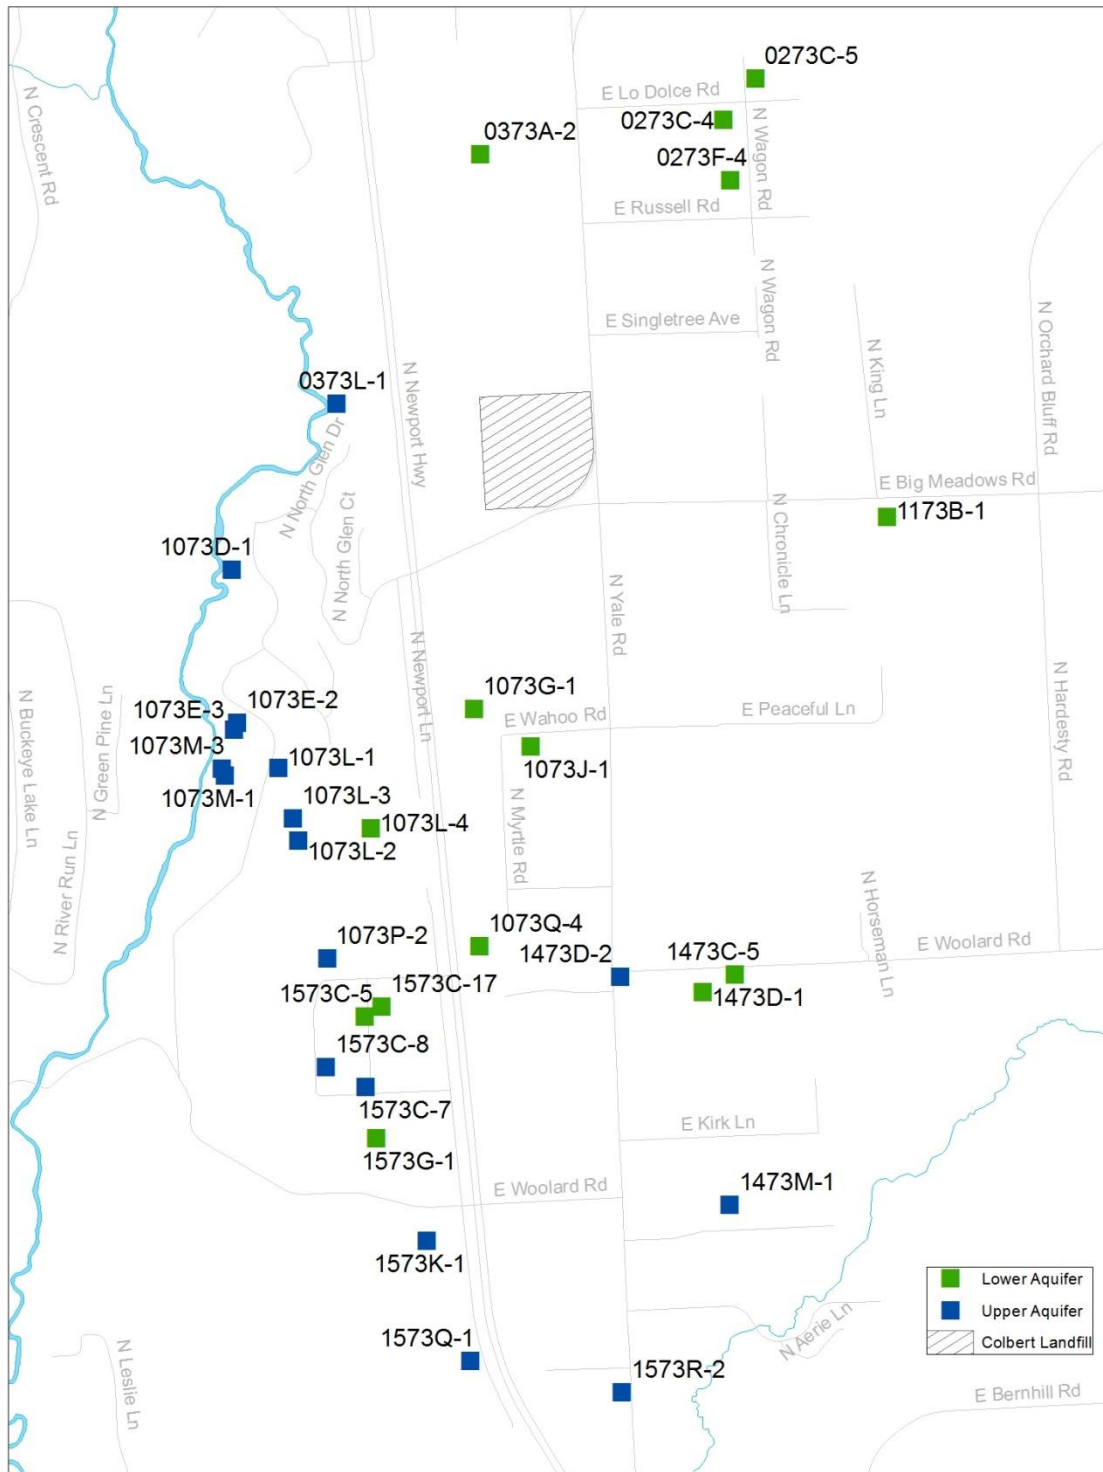


Table 4-1 Residential Well Sampling Schedule for Reporting Period

Colbert Residential Sampling Plan 2016

Station#	Last Name	Jan	Feb	Mar	Apr	May	June	July	Aug	Sept	Oct	Nov	Dec	Sched Comments
0273C-2	(b) (6)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
0273C-3		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	BI Annual 10'
0273C-4		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
0273C-5		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	many years no detects, wells bwn this and plume
0273D-6		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
0273F-4		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
0373A-2		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
0373A-4		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
0373J-3		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
0373L-1		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1073D-1		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1073E-2		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Alt w/1073E-3
1073E-3		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Alt w/1073E-2
1073E-4		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1073G-1		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
1073J-1		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1073L-1		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
1073L-2		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Alt w/1073L-3
1073L-3		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Alt w/1073L-2
1073L-4		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1073M-1		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Alt w/1073M-3
1073M-3		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Alt w/1073M-1
1073M-5		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1073P-1		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1073P-2		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

StationID	Location	Jan	Feb	Mar	Apr	May	June	July	Aug	Sept	Oct	Nov	Dec	Sched Comments
1073Q-4	NORTH MEADOWS W	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
1173B-1	(b) (6)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
1473C-5		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	BiAnnual (11) Alt w/1473D-1
1473D-1		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Alt w/1473C-5
1473D-2		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Alt w/1473C
1473M-1		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1573C-10		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1573C-17		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1573C-5		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1573C-7		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1573C-8		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	BiAnnual (10)
1573G-1		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	BiAnnual (11)
1573H-1		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1573K-1		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1573Q-1		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1573R-2		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3483M-1		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Table 4-2 Residential Groundwater Monitoring Program Results
(May 2017 through April 2018)

StationID	Aquifer	SampleDate	LastName	TCA	DCA	DCE	MC	PCE	TCE
1573G-1		5/10/2017	(b) (6)	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0273C-2	lower	10/11/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0273C-3	lower	6/21/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0273C-4	lower	11/14/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0273D-6	lower	8/30/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0273D-6	lower	2/6/2018		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0273F-4	lower	6/21/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0273F-4	lower	12/4/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0373A-2	lower	6/20/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0373A-2	lower	9/27/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0373A-2	lower	12/4/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0373A-2	lower	3/15/2018		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0373A-4	lower	10/11/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073G-1	lower	6/20/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073G-1	lower	9/27/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073G-1	lower	12/4/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073G-1	lower	3/15/2018		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073J-1	lower	7/12/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073J-1	lower	10/11/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073J-1	lower	2/6/2018		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073L-4	lower	9/27/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073Q-4	lower	6/20/2017	NORTH MEADOWS WATER	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073Q-4	lower	9/27/2017	NORTH MEADOWS WATER	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073Q-4	lower	12/4/2017	NORTH MEADOWS WATER	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073Q-4	lower	3/15/2018	NORTH MEADOWS WATER	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1473C-5	lower	8/30/2017	(b) (6)	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1573C-10	lower	6/21/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1573C-17	lower	10/11/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1573C-5	lower	8/31/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073E-3	upper	5/10/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073E-3	upper	8/30/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073E-3	upper	11/15/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073E-3	upper	2/7/2018		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073E-2	upper	7/12/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073E-2	upper	10/11/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073E-2	upper	2/7/2018		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0373L-1	upper	5/10/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
0373L-1	upper	11/14/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073D-1	upper	5/11/2017		0.54	<0.5	<0.5	<0.5	<0.5	<0.5
1073D-1	upper	5/11/2017		0.53	<0.5	<0.5	<0.5	<0.5	<0.5
1073D-1	upper	8/31/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5

Table 3-2 Continued

StationID	Aquifer	SampleDate	LastName	TCA	DCA	DCE	MC	PCE	TCE
1073L-1	upper	6/20/2017	(b) (6)	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073L-1	upper	9/27/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073L-1	upper	12/5/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073L-1	upper	12/5/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073L-1	upper	3/15/2018		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073L-2	upper	10/11/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073L-3	upper	5/10/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073L-3	upper	8/30/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073L-3	upper	11/15/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073M-1	upper	7/12/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073M-3	upper	6/20/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073P-1	upper	10/11/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1073P-2	upper	8/30/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1473D-2	upper	5/10/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1473D-2	upper	8/31/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1473D-2	upper	11/15/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1473D-2	upper	2/7/2018		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1473M-1	upper	7/12/2017		<0.5	0.76	<0.5	<0.5	<0.5	<0.5
1473M-1	upper	10/11/2017		<0.5	0.88	<0.5	<0.5	<0.5	<0.5
1473M-1	upper	2/7/2018		<0.5	0.73	<0.5	<0.5	<0.5	<0.5
1573C-7	upper	10/11/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1573C-8	upper	2/7/2018		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1573K-1	upper	10/11/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1573Q-1	upper	7/12/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1573R-2	upper	5/10/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
1573R-2	upper	11/15/2017		<0.5	<0.5	<0.5	<0.5	<0.5	<0.5

Figure 4-2 Upper Aquifer Residential Wells Concentrations vs Time


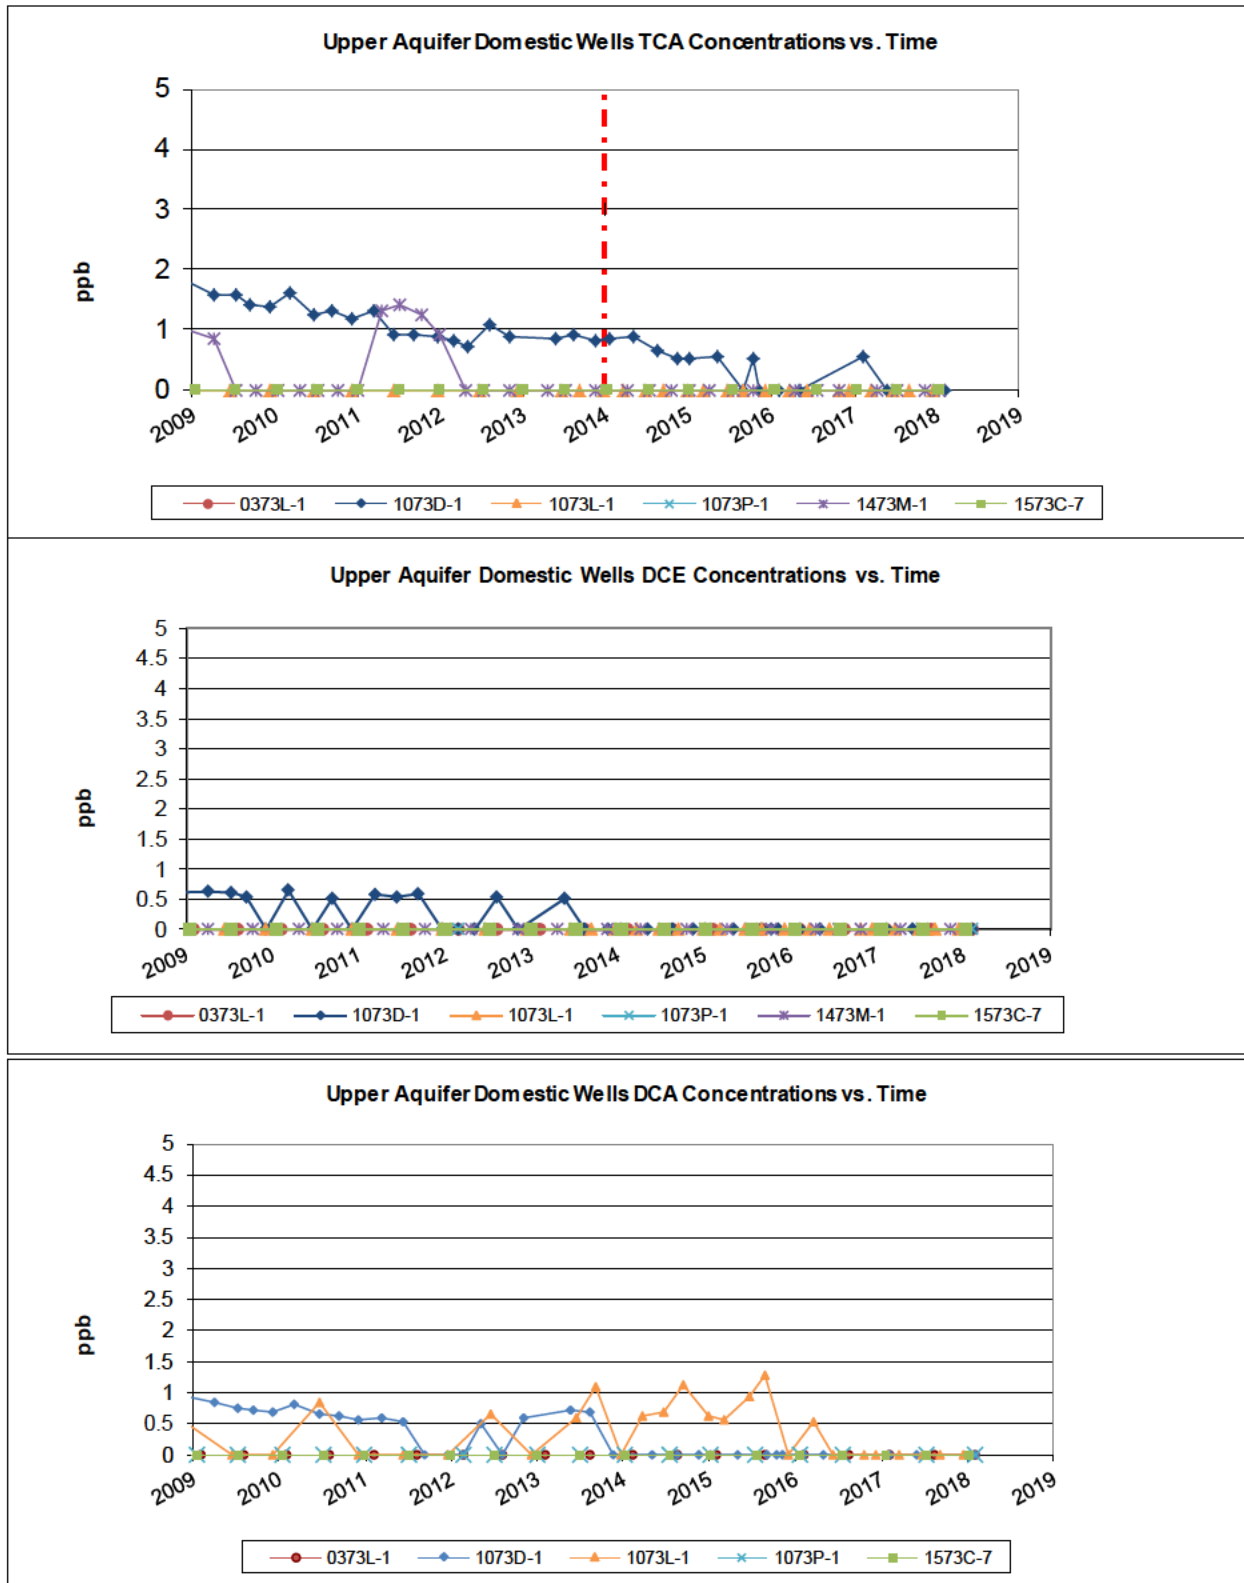


Figure 4-3 Lower Aquifer Residential Wells Concentrations vs Time

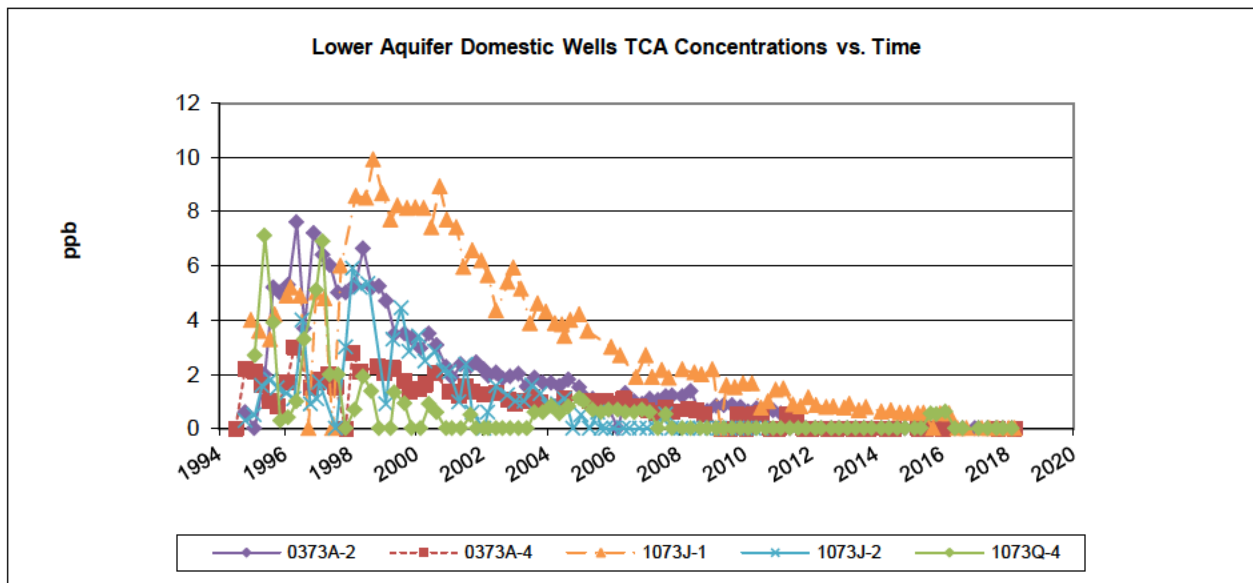

5.0 Landfill Operations and Maintenance

From May 1, 2014 through April, 2018 the following routine landfill cover and gas system monitoring and maintenance was accomplished at the Colbert Landfill. Data collected is included in this section.

- Monthly monitoring at gas probes and exhaust system
- Monthly condensate tank levels
- Monthly gas fan maintenance (greasing, belt tension adjustments, etc.)
- Landfill gas sampling and analysis (Method TO-15) was performed in April 2017.
- Quarterly monitoring of trench risers (June, October, February and April).

Other notable items include:

- Cover and ditch weed control was ongoing throughout the growing season.
- Carbon tub change outs were performed in November 2016 and April 2017.
- A cost-benefit analysis was conducted for the option to switch from the activated carbon gas filtration system to a biofilter system at the Colbert site in the fall of 2017. The practice had been to change out the activated carbon every 6 months, but due to the rising costs of purchasing new carbon material and disposing of the old, the annual cost of this practice had risen to \$25,000. Taking into account the higher upfront costs of constructing a biofilter, with lower lifetime costs of this system, we found that the financial break-even point over a 20 year period would be to change out the activated carbon every 1.5 years. In other words, if the activated carbon required changing more frequently than once per every 1.5 years, it is financially beneficial to undertake the construction and maintenance of a biofilter system.

From the fall of 2016 to the spring of 2018, Environmental techs had been sampling the effluent gas every 3 months for signs of “break-out,” or when compounds were no longer adsorbing to the carbon material. TO-15 samples for study were collected on 12/14/2016, 3/30/2017, 11/21/2017, and 3/21/2018. After a year and a half, the quarterly samples began to show small signs of mal-adsorption, with emissions of just a few compounds still less than De Minimus thresholds. Because of the financial modeling and the quarterly sampling results, the staff feel comfortable with a new plan to change out the activated carbon material once every 1.5 years now instead of the unnecessary 6-month change out.

Landfill Operations and Maintenance Field Data

6.0 References

Landau Associates. 1992. Phase II Remedial Design Remedial Action Colbert Landfill Spokane, Washington *Final Groundwater Monitoring Plan*. August 7.

Landau Associates. 1992. *Quality Assurance Project Plan - Phase II Remedial Design/Remedial Action - Colbert Landfill - Spokane, WA*. February 28.

Landau Associates. 1991. Colbert Landfill Remedial Design Remedial Action Spokane County, Washington *Final Phase I Engineering Report*. December 30.

EPA. 2011. Colbert Landfill Superfund Site Spokane County, Washington. *Remediation System Evaluation*. U.S. Environmental Protection Agency. October 14.

Landau Associates. 1998. *Colbert Landfill Operations and Maintenance Manual*.

Landau Associates. 1996. *MFS Groundwater Monitoring Plan*

Spokane County Utilities/ Landau Assoc. 2013. *Final Work Plan, Groundwater Pump and Treat System Shut-down Test, Colbert Landfill CERCLA Site*.

Spokane County Utilities. 2007. *1,4-Dioxane Work Plan for the Colbert Landfill*

Spokane County Utilities. 1991. *Quality Assurance and Field Sampling Plan-Colbert Residential Well Sampling*

CH2MHill. May 1997. *Operations and Maintenance Manual for Colbert Landfill Closure*

U.S. District Court, Eastern District of Washington. 1988. Consent Decree No. C-89-033-RJM. The Washington State Department of Ecology and The United States of America on behalf of the U.S. Environmental Protection Agency (plaintiffs) v. County of Spokane and Key Tronic Corporation (defendants). February 28.